

CATALOG IH-18

Industrial Hose & Rubber Products



**World Class
Solutions**



**ABBOTT RUBBER
COMPANY, INC.**

INDUSTRIAL HOSE PRICE LIST - FEBRUARY 2018



We welcome you to visit our 100,000 square foot facilities in Elk Grove Village, IL.



Order Entry and Technical Assistance - Our Specialty

ABBOTT RUBBER COMPANY, INC.

1700 Nicholas Blvd.
ELK GROVE VILLAGE, IL 60007

(847) 952-1800

OUT OF STATE TOLL FREE

(800) 852-1855

FAX

(847) 952-0156

E-MAIL sales@abbottrubber.com

WEBSITE www.abbottrubber.com



Unparalleled Personalized Service

QUICK INDEX

Item	Page	Item	Page
Air & Multi-Purpose Hose	4-6	Special Purpose Hose	29-32
Water Hose	7-12	Automotive Hose	33-35
Steam Hose	13	Rubber & Plastic Tubing	36-41
Food Hose	14-16	Flexible Metal Hose	42
Petroleum Hose	17-19	Hydraulic Hose	43-45
Acid & Chemical Hose	19-21	Rubber Expansion Joints	46
Vacuum & Materials Handling Hose	21-23	Technical Data	47-49
Exhaust & Ventilation Hose	24-28		



800-852-1855



www.abbottrubber.com



Large inventory of bulk hose and coupled assemblies. Over 1,000 assemblies in stock.

Serving the Industrial Market for Over 65 Years



We can fabricate to your exact hose needs.



MEMBER OF THE ASSOCIATION FOR HOSE AND ACCESSORIES DISTRIBUTION

*All of our hose assemblies are fabricated according to the
latest NAHAD Hose Safety Institute's Guidelines*



800-852-1855



www.abbottrubber.com

Air & Multi-Purpose Hose

Industrial Air & Water Hose

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
1/4"	1	.500	200#	500'	0.09	\$.88
1/4"	2	.530	250#	500'	0.11	.92
1/4"	2	.530	300#	500'	0.10	1.16
5/16"	1	.580	200#	500'	0.12	1.00
3/8"	1	.670	200#	500'	0.15	1.05
3/8"	2	.685	250#	500'	0.17	1.20
3/8"	2	.690	300#	500'	0.18	1.38
1/2"	1	.810	200#	500'	0.20	1.32
1/2"	2	.840	250#	500'	0.22	1.52
1/2"	2	.840	300#	500'	0.22	1.88
5/8"	1	.970	200#	500'	0.27	2.15
5/8"	2	.980	250#	500'	0.27	2.25
3/4"	1	1.120	200#	500'	0.34	2.06
3/4"	2	1.140	250#	500'	0.35	2.36
3/4"	2	1.150	300#	500'	0.37	2.45
1"	2	1.410	200#	450'	0.54	3.38
1 1/4"	2	1.730	200#	400'	0.75	6.35
1 1/2"	2	1.980	200#	300'	0.86	7.75
2"	2	2.500	200#	200'	1.16	13.10



Available Colors



(Series 1010)


LESS 10% FULL REELS

Non-Conductive G/P Air & Water Hose

Service: A medium duty general purpose hose for handling air and water applications. Non-Conductive. Temperature range: -20°F to 180°F.

Construction: Black, Nitrile, oil resistant rubber tube with 1 or 2 braid equivalent of spiral reinforcement. Red Neoprene, good oil, abrasion and weather resistant cover. Black cover available most sizes.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
1/4"	2	.562	300#	800'	0.12	\$ 1.68
3/8"	2	.687	300#	650'	0.17	2.00
1/2"	2	.875	300#	500'	0.26	2.64
3/4"	2	1.156	300#	400'	0.39	3.56
1"	2	1.437	300#	300'	0.54	8.34

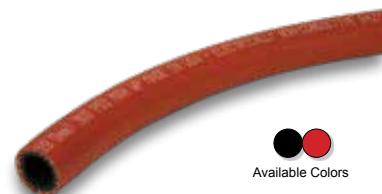

Available Colors



(Series 1024)

LESS 10% FULL REELS

Air & Multi-Purpose Hose

Service: A premium quality, versatile multi-purpose for handling oil, kerosene, air, water and dilute acids.

Non-Conductive.

Temperature range: -20°F to 190°F.

Construction: Black, Nitrile, oil-resistant tube with 1 or 2 braid equivalent of spiral reinforcement. Red Nitrile/PVC, excellent oil, weather and abrasion resistant cover. Black available most sizes. Also available in low temperature grade to -65°F.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
1/4"	1	.530	250#	500'	0.09	\$ 1.84
1/4"	2	.610	300#	500'	0.14	2.14
5/16"	1	.620	250#	500'	0.14	2.18
3/8"	1	.690	250#	500'	0.15	2.24
3/8"	2	.730	300#	500'	0.18	2.74
1/2"	1	.840	250#	500'	0.20	2.80
1/2"	2	.890	300#	500'	0.25	3.52
5/8"	2	1.060	300#	500'	0.35	4.08
3/4"	2	1.190	300#	500'	0.40	5.08
1"	2	1.500	300#	450'	0.59	6.92
1 1/4"	2	1.810	300#	400'	0.70	12.58
1 1/2"	2	2.080	300#	300'	0.96	14.25
2"	2	2.500	250#	200'	1.08	24.70



Available Colors



(Series 1030)

LESS 10% FULL REELS



Air & Multi-Purpose Hose


PVC Air/Water/Spray Hose

Service: High quality, PVC hose that can be used for air, water and oil spray applications.

Temperature range:
-15°F to 150°F.

Construction: Close tolerance PVC/Nitrile, tube reinforced with 1 ply of polyester braided fiber. Weather-resistant PVC/Nitrile cover. Available in Red, Yellow, Blue or Gray cover.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
1/4"	1	.500	300#	100/500'	0.08	\$.84
3/8"	1	.625	300#	100/500'	0.11	1.05
1/2"	1	.812	250#	100/500'	0.18	1.28
3/4"	1	1.125	250#	100/300'	0.30	2.40
1"	1	1.406	250#	100/300'	0.41	2.98

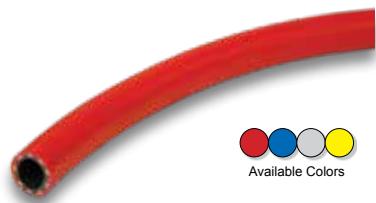

Available Colors



(Series 1040)


AVAILABLE IN STANDARD LENGTHS ONLY

PVC Air/Water Hose

Service: Lightweight flexible economy grade PVC hose that can be used for general service air and water applications. Temperature range: -10°F to 150°F.

Construction: PVC tube and cover reinforced with spiral polyester. Available in Red or Blue cover.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
1/4"	1	.450	300#	750'	0.06	\$.56
3/8"	1	.600	300#	750'	0.09	.62
1/2"	1	.780	300#	750'	0.15	1.24
5/8"	1	.940	250#	500'	0.20	1.74
3/4"	1	1.110	250#	450'	0.28	1.96
1"	1	1.380	200#	400'	0.37	2.82
1 1/4"	1	1.687	200#	100'	0.52	6.15
1 1/2"	1	1.937	200#	100'	0.61	7.20
2"	1	2.510	125#	100'	0.91	9.55

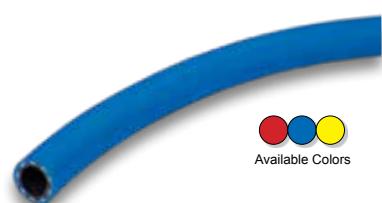

Available Colors



(Series 1048)

LESS 10% FULL REELS THRU 1" I.D.

Light Duty Multi-Purpose Hose

Service: For bench tools, assembly lines, and low pressure hydraulic lines where a lightweight, flexible, and easy to handle hose is required.

Temperature range:
-40°F to 180°F.

Construction: Black Nitrile tube, reinforced with a single braid of high tensile rayon cord. Black Neoprene cover.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
1/4"	1	.437	200#	650'	0.07	\$ 2.78
3/8"	1	.625	200#	650'	0.11	3.40



Available Colors



(Series 1050)

LESS 10% FULL REELS

Braided Cover Hose

Service: Designed for conducting air, water, oils and certain chemicals and gases where extreme flexibility is required.

Construction: Nitrile, oil resistant tube. Black braided textile yarn reinforcement. No outside cover. Tracer colors available. Neoprene cement treatment over-braid or Nitrile/PVC cover available.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
1/4"	1	.437	250#	0.05		\$ 1.78



Available Colors



(Series 1060)

SUBJECT TO MINIMUM ORDER QUANTITIES



800-852-1855



www.abbottrubber.com

Air & Multi-Purpose Hose

Push-On Hose


Service: Recommended for air, water, or low pressure hydraulic service and many other industrial applications. Non-Conductive.

Temperature range:
-40°F to 190°F.

Construction: Black Nitrile, oil resistant tube, single ply of neutral-angle braided fiber. Oil resistant rubber cover.

Available in Black, Green, Blue, Gray or Red cover.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
1/4"	1	.540	300#	500'	0.10	\$ 1.88
3/8"	1	.690	300#	500'	0.14	2.15
1/2"	1	.810	300#	500'	0.17	2.68
5/8"	1	.930	300#	500'	0.20	4.20
3/4"	1	1.070	300#	500'	0.26	5.82

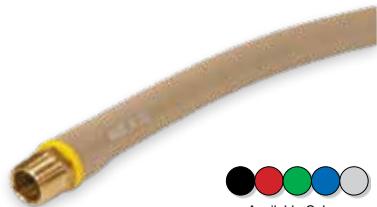

Available Colors



(Series 1910)

LESS 15% FULL REELS

500# Multi-Purpose Hose

Service: Heavy duty multi-purpose hose for applications requiring long life. Non-conductive. Temperature range:
-20°F to 190°F.

Construction: Highest quality oil resistant Nitrile tube, reinforced with a special spiral yarn. Fluorescent Yellow carboxylated Nitrile/PVC abrasion resistant cover.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
1/4"	2	.610	500#	500'	0.17	\$ 3.90
3/8"	2	.730	500#	500'	0.22	4.78
1/2"	2	.890	500#	500'	0.28	6.74
3/4"	2	1.190	500#	500'	0.41	8.90
1"	2	1.500	500#	450'	0.58	13.18
1 1/2"	2	1.770	500#	450'	0.79	21.08
1 1/2"	2	2.040	500#	450'	0.86	24.15
2"	2	2.620	500#	200'	1.22	25.36



(Series 1034)

LESS 10% FULL REELS

Fabric-Braid Air Hose

Service: A medium pressure, heavy duty hose for air, water and jetting applications. Temperature range:
-25°F to 185°F.

Construction: Oil mist resistant rubber tube, synthetic textile yarn reinforcement. High visibility, bright Yellow rubber cover.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Length	Ft	Price/Ft
3/4"	Fabric	1.187	225#	25/50/100'	0.40	\$ 3.60
1"	Fabric	1.500	225#	25/50/100'	0.54	4.10
1 1/4"	Fabric	1.812	225#	25/50/100'	0.81	6.30
1 1/2"	Fabric	2.187	225#	25/50/100'	0.92	8.50
2"	Fabric	2.625	225#	25/50/100'	1.37	9.76
2 1/2"	Fabric	3.125	225#	25/50/100'	1.69	14.12
3"	Fabric	3.625	225#	25/50/100'	2.16	16.50



AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1070)

Wire-Braid Air Hose

Service: Engineered for heavy duty applications. Particularly suited for jetting or air hose for underground mining. Temperature range:
-40°F to 200°F.

Construction: Nitrile rubber tube, multi-strand steel wire reinforcement, high-visibility bright Yellow rubber cover. Resists cutting and gouging in rough service applications.

I.D.	Braid	O.D.	W/P		Weight	
			@70°F	Length	Ft	Price/Ft
3/4"	1-Wire	1.140	750#	25/50'	0.45	6.28
1"	1-Wire	1.450	750#	25/50'	0.66	10.80
1 1/4"	1-Wire	1.810	500#	25/50'	0.98	16.20
1 1/2"	1-Wire	1.980	500#	25/50'	0.97	17.40
2"	1-Wire	2.660	500#	25/50'	1.59	17.75
2 1/2"	1-Wire	3.330	400#	25/50'	2.63	35.74
3"	1-Wire	3.810	400#	25/50'	3.07	40.10
4"	2-Wire	4.990	400#	25/50'	4.29	64.26



AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1080)



Water Hose

Rubber Water Suction Hose

	I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
Service: General purpose water suction hose for contractors, industrial, and agricultural service. Temperature range: -10°F to 180°F.	1 1/4"	1.700	150#	28.0	6.0	0.75	\$ 6.20
	1 1/2"	1.960	150#	28.0	6.5	0.80	6.70
	2"	2.490	150#	28.0	8.0	1.11	7.82
	2 1/2"	3.000	150#	28.0	10.0	1.75	9.70
	3"	3.500	150#	28.0	12.0	2.24	11.54
Construction: Black smooth EPDM blend tube, fabric plies and steel wire spiral for full suction service. Black rubber cover.	3 1/2"	4.062	75#	28.0	15.0	2.25	19.86
	4"	4.530	125#	28.0	18.0	2.79	18.42
	6"	6.540	100#	28.0	31.0	5.75	34.25
	8"	8.790	75#	28.0	42.0	6.59	61.80
	10"	11.000	75#	28.0	50.0	10.25	96.56
	12"	13.000	75#	25.0	60.0	13.50	126.18



(Series 1210)

Corrugated PVC Water Suction Hose

	I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
Service: General purpose suction and transfer hose with corrugated O.D. for flexibility. Temperature range: 15°F to 140°F.	1 1/2"	1.180	45#	29.8	2.5	0.35	\$ 2.82
	2"	2.375	40#	29.8	3.0	0.50	3.78
	2 1/2"	2.875	35#	29.8	4.5	0.68	5.70
	3"	3.500	35#	29.8	6.0	1.00	7.78
Construction: Clear flexible PVC reinforced with a rigid PVC helix. Also available in over-the-pipe sizes. Maximum length - 100 ft.	4"	4.625	30#	29.8	8.0	1.52	12.44
	6"	6.812	30#	28.0	11.0	3.10	24.84
	8"	9.000	30#	28.0	16.0	5.38	42.95
	10"	11.250	30#	28.0	30.0	8.88	93.98



USA
(Series 1251)

LESS 5% - FULL COILS OF 100 FT SIZES 1-1/2" THRU 4" I.D.

Clear Braid PVC Water Suction/Transfer Hose

	I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
Service: Specially designed for suction or transfer applications where visual flow or pressure is required. Temperature range: 15°F to 140°F.	1 1/2"	2.000	110#	28.0	2.5	0.47	\$ 6.54
	2"	2.562	100#	28.0	4.0	0.70	7.84
	3"	3.750	100#	28.0	6.3	1.13	9.28
Construction: Flexible PVC, clear, with an Orange rigid PVC helix. Reinforced with a layer of spiral yarn.	4"	4.750	75#	28.0	7.1	1.74	13.92
	6"	7.187	70#	28.0	10.2	3.88	28.48
	8"	9.312	60#	28.0	15.7	5.54	46.96
	10"	11.625	40#	28.0	24.8	8.68	72.20
	12"	13.625	28#	25.0	45.0	10.30	114.38



USA
(Series 1242)

LESS 5% - FULL COILS OF 100 FT SIZES 1-1/2" THRU 6" I.D.

Royalflex® Water Suction Hose

	I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
Service: A multi-purpose hardwall suction and discharge for use in construction and industrial applications. Temperature range: -20°F to 180°F.	1 1/2"	2.000	300#	Full	6.0	0.81	\$ 20.36
	2"	2.500	300#	Full	8.0	1.09	30.00
	2 1/2"	3.000	300#	Full	10.0	1.32	33.64
Construction: Integral tube and cover reinforced with interwoven polyester and helical steel wire. Blue in color.	3"	3.500	250#	Full	12.0	1.94	42.88
	4"	4.500	200#	Full	16.0	2.72	57.06



USA
(Series 1260)

LESS 5% FULL COILS OF 50/60/100 OR 120 FT.



800-852-1855



www.abbottrubber.com

Water Hose

Industrial Water Hose

Service: Moderate pressure water hose for contractors and industrial applications. Temperature range: -40°F to 190°F.

Construction: Black EPDM tube, smooth, friction free for maximum water delivery with 1 or 2 braid equivalent of spiral reinforcement. Black EPDM cover resists abrasion, cutting and sun checking.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
3/8"	1	.660	150#	500'	0.13	\$.94
3/8"	2	.700	250#	500'	0.15	1.20
1/2"	1	.780	150#	500'	0.17	1.16
1/2"	2	.840	250#	500'	0.20	1.52
5/8"	1	.930	150#	500'	0.26	1.60
5/8"	2	.980	250#	500'	0.27	2.25
3/4"	1	1.080	150#	500'	0.33	1.65
3/4"	2	1.120	200#	500'	0.34	2.36
1"	2	1.390	150#	450'	0.52	2.80
1 1/4"	2	1.630	150#	400'	0.57	6.04
1 1/2"	2	1.880	150#	300'	0.68	6.35
2"	2	2.500	150#	200'	1.16	12.70

LESS 10% FULL REELS



Service: Moderate pressure water hose assembly for contractors and industrial service. Temperature range: -40°F to 190°F.

Construction: Contractors grade Black rubber assembly includes machined brass GHT couplings thru 3/4", NPSH couplings 1" thru 2" I.D.

I.D.	Braid	W/P @70°F	Price/25 Ft.	Price/50 Ft.
			w/ M+F Cplgs.	w/ M+F Cplgs.
5/8"	1	150#	\$ 51.50	\$ 83.50
3/4"	1	150#	54.00	88.00
3/4"	2	200#	67.00	113.50
1"	2	150#	93.50	154.00
1 1/2"	2	150#	158.00	290.00
2"	2	150#	298.00	565.00

CONTACT US FOR NON-STANDARD LENGTHS



Service: Low cost water hose assembly for contractors and industrial service.

Construction: Quality reinforced Green cover PVC includes spun brass GHT thru 3/4". 1" I.D. NPSH couplings.

I.D.	Braid	W/P @70°F	Price/25 Ft.	Price/50 Ft.
			w/ M+F Cplgs.	w/ M+F Cplgs.
5/8"	1	125#	\$ 14.25	\$ 25.00
3/4"	1	125#	27.00	60.00
1"	1	125#	93.00	180.00

CONTACT US FOR NON-STANDARD LENGTHS



Pressure Washer Hose Assembly

Service: High pressure water hose assembly for use with pressure washers and carpet cleaning equipment.

Construction: Black oil resistant tube and cover. Assembly includes crimped on male pipe thread ends, with swivel one end, and a bend restrictor on both ends. Also available with a Blue or Gray non-marking cover, most sizes at additional charge.

I.D.	Braid	W/P @70°F	Maximum	Price/25 Ft.	Price/50 Ft.
			Temp	w/ M+F Cplgs.	w/ M+F Cplgs.
1/4"	1-Wire	3000#	250°F	\$ 77.00	\$ 127.50
3/8"	1-Wire	3000#	250°F	85.50	140.00
3/8"	2-Wire	4500#	250°F	110.00	189.00
3/8"	2-Wire	6000#	250°F	176.75	323.50
1/4"	Fabric	1500#	200°F	\$ 73.50	\$ 121.50
3/8"	Fabric	1500#	200°F	89.25	148.00

CONTACT US FOR NON-STANDARD LENGTHS



Water Hose

Rubber Water Discharge Hose

I.D.	Ply	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
1½"	2	1.875	100#	25/50/100'	0.60	\$ 4.88
1½"	4	2.000	150#	25/50/100'	0.83	7.72
2"	2	2.312	100#	25/50/100'	0.84	6.70
2"	4	2.562	150#	25/50/100'	1.11	9.88
2½"	2	2.750	100#	25/50/100'	0.91	8.18
2½"	4	3.062	150#	25/50/100'	1.24	11.52
3"	2	3.375	100#	25/50/100'	1.12	10.38
3"	4	3.562	150#	25/50/100'	1.50	13.30
4"	2	4.375	100#	25/50/100'	1.28	13.44
4"	4	4.625	150#	25/50/100'	1.85	18.26
6"	2	6.500	75#	25/50/100'	3.45	22.48
6"	4	6.562	125#	25/50/100'	3.90	30.12
6½"	2	7.010	75#	25/50/100'	2.17	34.24
8"	4	8.562	100#	25/50'	5.25	49.42
10"	4	10.562	75#	25/50'	6.29	61.54
12"	4	12.562	50#	25/50'	7.83	81.82



AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1120)

Wash-Down Hose

Service: Low pressure hose for hot water (up to 200°F) for wash-down service in creamery, meat packing and food processing plants.

Construction: Black synthetic tube, synthetic cord reinforcement and oil and abrasion resistant White cover.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
1/2"	2	.910	300#	500'	0.27	\$ 3.65
3/4"	2	1.180	300#	500'	0.40	4.18
1"	2	1.500	300#	450'	0.60	7.14



(Series 1510)

LESS 10% FULL REELS

Wire Braid Wash-Down Hose

Service: High pressure wash-down hose for applications requiring a non-marking cover. Will handle up to 180°F hot water.

Construction: Black, heat and detergent resistant tube, wire braid reinforcement, Yellow cover compounded for resistance to animal fats, detergents and abrasion.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
3/8"	1-Wire	.687	1000#	350'	0.25	\$ 5.32
1/2"	1-Wire	.843	1000#	350'	0.32	5.60
3/4"	1-Wire	1.156	1000#	350'	0.46	7.70



(Series 1515)


LESS 10% FULL REELS

Paper Mill/Creamery Hose

Service: For general wash-down using hot water or low pressure saturated steam in processing plants. Maximum operating temperature 250°F.

Construction: Heat resistant EPDM tube reinforced with plied polyester cord. Available with White or Green cover. Includes built-in tapered nozzle one end.

I.D.	Ply	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
3/4"	2	1.250	150#	50'	0.43	\$ 7.40
1"	2	1.437	150#	50'	0.52	8.15
1¼"	2	1.812	150#	50'	0.77	10.38
1½"	2	2.062	150#	50'	0.91	12.94

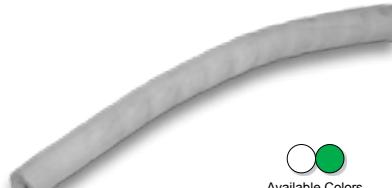

Available Colors

AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1520)



800-852-1855



www.abbottrubber.com

Water Hose

PVC Water Discharge Hose

Service: Designed for moderate open end water discharge service. Strong, lightweight and flexible lay flat hose for construction site service.

Construction: Close woven nylon jacket impregnated with PVC. Mildew resistant. Rolls up flat for easy storage. Blue in color.

I.D.	Wall	W/P @70°F	Weight		Price/Ft
			Coil	Ft	
1"	.052	100#	300'	0.10	\$.84
1½"	.059	80#	300'	0.18	.74
2"	.059	80#	300'	0.24	.78
2½"	.059	65#	300'	0.30	1.86
3"	.063	80#	300'	0.36	1.58
4"	.067	70#	300'	0.53	2.18
6"	.075	50#	300'	0.86	4.18
8"	.087	35#	300'	1.30	8.90
10"	.111	35#	100'	1.81	21.80
12"	.118	35#	100'	1.95	30.00
14"	.118	30#	100'	2.62	64.00
16"	.118	30#	100'	3.10	75.00



(1½" ID thru 8" ID)

(Series 1148)

LESS 10% FULL COILS THRU 10" I.D. STANDARD COILS ONLY 12" THRU 16" I.D.

Heavy Duty PVC Water Discharge Hose

Service: Heavy duty discharge hose for use in higher pressure open end applications.

Construction: PVC reinforced with three spiral plies of synthetic cord. Mildew resistant. Rolls up flat for easy storage. Red in color.

I.D.	Wall	W/P @70°F	Weight		Price/Ft
			Coil	Ft	
1½"	.079	150#	300'	0.27	\$ 1.52
2"	.087	150#	300'	0.34	1.98
2½"	.091	150#	300'	0.40	3.80
3"	.095	150#	300'	0.55	2.96
4"	.102	150#	300'	0.85	4.42
6"	.119	150#	300'	1.20	7.56
8"	.124	70#	300'	1.30	12.60



(Thru 4" ID)

(Series 1152)


LESS 10% FULL COILS

Extra Heavy Duty PVC Water Discharge Hose

Service: Recommended for open end use with high capacity pumps in irrigation and construction.

Construction: Heavy PVC/Nitrile tube reinforced with extra heavy fabric. Cover is Yellow abrasion resistant PVC/Nitrile. Also available in Black color.

I.D.	Wall	W/P @70°F	Weight		Price/Ft
			Length	Ft	
1½"	.110	200#	50/100'	0.26	\$ 3.40
2"	.110	200#	50/100'	0.34	4.05
2½"	.110	200#	50/100'	0.47	4.80
3"	.110	200#	50/100'	0.65	6.32
4"	.110	175#	50/100'	0.83	9.12
6"	.110	125#	50/100'	1.60	14.16
8"	.110	125#	50/100'	2.30	25.20

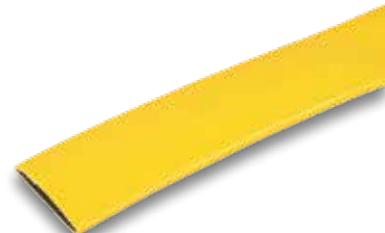

AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1166)

Heavy-Duty Industrial Water Discharge Hose

Service: Heavy duty lay flat oil resistant discharge hose for high capacity pumps and compressed air sizes thru 2". Temperature range: -30°F to 180°F.

Construction: Extruded synthetic rubber reinforced with circular woven polyester and nylon. Ribbed, abrasion and sunlight resistant cover.

I.D.	Wall	W/P @70°F	Color	Weight		Price/Ft
				Length	Ft	
3/4"	.100	300#	Yellow	50/100'	0.10	\$ 5.40
1"	.140	300#	Yellow	50/100'	0.14	5.84
1½"	.140	200#	Yellow	50/100'	0.30	6.30
2"	.140	150#	Yellow	50/100'	0.35	8.70
3"	.160	250#	Yellow	50/100'	0.64	11.64
4"	.170	200#	Yellow	50/100'	1.00	16.20
6"	.170	200#	Yellow	50/100'	1.35	29.65



AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1168)



Water Hose

Heavy Duty Mill Discharge Hose

Service: General purpose lay flat water discharge hose.

Construction: Black SBR age resistant rubber tube. White all polyester cover. Will not absorb moisture.

I.D.	Jacket	Service Pressure	Length	Weight Ft	Price/Ft
1"	Single	150#	25/50/100'	0.14	\$ 2.04
1½"	Single	150#	25/50/100'	0.18	1.88
2"	Single	150#	25/50/100'	0.24	2.48
2½"	Single	150#	25/50/100'	0.35	3.50
3"	Single	150#	25/50/100'	0.38	3.80
4"	Single	150#	25/50'	0.63	6.46



(Series 1130)

AVAILABLE IN STANDARD LENGTHS ONLY

Pin Rack Fire Hose Assemblies

Service: Lightweight, compact, easy to handle, fully lined fire hose that folds easily for pin rack storage.

Construction: 100% synthetic, totally immune to deterioration from mildew and rot. Coupled with brass NST or NPSH male & female rocker-lug.

I.D.	Jacket	Test Pressure	Length	Weight Each	Price/50 Ft Assembly
1½"	Single	500#	50'	5.0	\$ 126.50
2½"	Single	500#	50'	13.0	345.00



(Series 2110)

U/L LABEL AVAILABLE - ADD \$.40/ FT 1-1/2 SIZE ONLY

Industrial Fire Hose Assemblies

Service: Designed for interior fire fighting and fire protection.

Construction: Single or double jacketed 100% polyester. Ozone resistant tube. Available with Underwriters' and/or Factory Mutual labels. Rubber, Neoprene and other treatments available. Coupled with aluminum NST or NPSH male & female rocker-lug. Also available with brass couplings.

I.D.	Jacket	Test Pressure	Length	Weight Each	Price/50 Ft Assembly
1½"	Single	300#	50'	11.0	\$ 108.50
2½"	Single	300#	50'	18.0	196.50
1½"	Single	500#	50'	13.0	135.00
2½"	Single	500#	50'	21.0	225.00
1½"	Double	800#	50'	16.0	180.00
2½"	Double	800#	50'	29.0	270.50



(Series 2120)

(Series 2130)

(Series 2150)

ALSO AVAILABLE IN 100 FT LENGTHS

U/L LABEL AVAILABLE - ADD \$.42/ FT

Nitrile Rubber Fire Hose Assemblies

Service: Rubber hose for fire fighting and wash-down service. Meets NFPA 1961 & 1962. Oil resistant. Temperature range: -30°F to 180°F.

Construction: Extruded synthetic rubber reinforced with circular woven polyester and nylon. Available with Red or Yellow ribbed cover. Coupled with aluminum NST or NPSH male & female rocker-lug. Also available with brass couplings.

I.D.	Wall	Test Pressure	Length	Weight Each	Price/50 Ft Assembly
1½"	.120	600#	50'	17.0	\$ 240.00
1¾"	.120	600#	50'	14.0	---
2"	.120	600#	50'	16.0	---
2½"	.140	600#	50'	24.0	390.50
3"	.160	500#	50'	--	---
4"	.160	450#	50'	--	---
5"	.160	400#	50'	--	---
6" *	.160	300#	50'	--	---



(Series 2160)

* NOT U/L LISTED
ALSO AVAILABLE IN 100 FT LENGTHS



800-852-1855



www.abbottrubber.com

Water Hose

Mine Spray Hose

Service: High pressure water spray hose designed to control dust in underground mining. Also used on continuous mining machinery.

Construction: Black synthetic oil mist resistant tube reinforced with high tensile steel wire braid. Yellow MSHA flame resistant cover. 3:1 Design Factor

I.D.	Braid	O.D.	W/P		Length	Weight	
			@70°F	Ft		Price/Ft	
3/4"	1-Wire	1.220	1000#	50/100'	0.60	\$ 3.98	
1"	1-Wire	1.490	1000#	50/100'	0.80	4.78	
1 1/4"	1-Wire	1.810	1000#	50/100'	1.05	6.35	
1 1/2"	1-Wire	2.040	1000#	50/100'	1.24	9.72	
2"	1-Wire	2.600	1000#	50/100'	1.80	14.44	



AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1185)

Furnace Door Hose

Service: Used to convey cooling water (up to 250°F) to furnace doors in steel mills, glass plants and foundries. Cover is resistant to 575°F.

Construction: Non-conductive, EPDM heat resistant tube, 2 plies of high tensile reinforcement and a fiberglass flame resistant cover.

I.D.	Ply	O.D.	W/P		Length	Weight	
			@70°F	Ft		Price/Ft	
1/2"	2	.980	150#	100'	0.30	\$ 8.90	
3/4"	2	1.300	150#	100'	0.47	10.24	
1"	2	1.540	150#	100'	0.58	10.50	
1 1/4"	2	1.890	150#	100'	0.84	14.24	
1 1/2"	2	2.130	150#	100'	0.98	18.20	
2"	2	2.540	150#	100'	1.28	21.52	



AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1170)

PVC Pure Water Hose

Service: High quality flexible PVC hose for pure water applications. NSF-51 compliant. Temperature range: 25°F to 150°F.

Construction: Clear PVC FDA tube with polyester reinforcement. Dark Gray PVC cover.

I.D.	Braid	O.D.	W/P		Coil	Weight	
			@70°F	Ft		Price/Ft	
3/8"	1	.625	225#	300'	0.09	\$ 1.44	
1/2"	1	.750	200#	300'	0.13	2.14	
3/4"	1	1.000	150#	300'	0.21	2.86	
1"	1	1.312	125#	100'	0.29	4.45	
1 1/4"	1	1.687	100#	100'	0.52	7.62	
1 1/2"	1	1.937	100#	100'	0.60	9.02	
2"	1	2.500	75#	100'	0.87	11.60	



LESS 10% FULL COILS

(Series 3025)

NSF Potable Water Hose

Service: A lay-flat temporary water supply hose with strength and abrasion resistance. Complies with NSF 61 grade can be used for potable water applications. Flexible at temperatures to -58°F.

Construction: High abrasion resistant extruded thermoplastic polyurethane reinforced with high strength circular woven filament polyester yarn. Cover is Blue.

I.D.	Ply	Wall	W/P		Coil	Weight	
			@70°F	Ft		Price/Ft	
1"	1	.060	250#	650'	0.11	\$ 7.60	
1 1/2"	1	.070	200#	650'	0.19	8.75	
2"	1	.080	200#	650'	0.25	10.50	
2 1/2"	1	.090	200#	650'	0.33	12.50	
3"	1	.110	200#	650'	0.47	16.25	
4"	1	.110	175#	650'	0.90	23.40	
6"	1	.120	150#	650'	1.48	38.65	



LESS 10% FULL COILS

(Series 1159)



Steam Hose

#250 Steam Hose

Service: For maximum safety in conducting steam up to 450°F.

Construction: EPDM, heat resistant tube. Reinforced with two braids of steel wire. EPDM cover compounded for maximum heat resistance. Black cover. Red cover available most sizes.

I.D.	Braid	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
1/2"	2-Wire	1.060	250#	25/50/100'	0.45	\$ 5.82
3/4"	2-Wire	1.280	250#	25/50/100'	0.46	6.30
1"	2-Wire	1.630	250#	25/50/100'	0.91	10.10
1 1/4"	2-Wire	1.810	250#	25/50'	0.83	17.45
1 1/2"	2-Wire	2.090	250#	25/50'	1.03	20.50
2"	2-Wire	2.780	250#	25/50'	1.88	31.36
3"	2-Wire	3.770	250#	25/50'	2.33	36.92



Available Colors



(1/2" ID thru 2" ID)

(Series 1330)

1/2" I.D. & 3/4" I.D. ALSO AVAILABLE IN CUT LENGTHS OR 500 FT REELS
AVAILABLE IN STANDARD LENGTHS ONLY

#250 Oil Resistant Steam Hose

Service: For maximum safety in conducting steam up to 450°F, where the cover will encounter petroleum products.

Construction: EPDM, heat resistant tube. Reinforced with two braids of carbon steel wire. EPDM cover compounded for maximum heat and oil resistance. Black cover.

I.D.	Braid	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
1/2"	2-Wire	1.060	250#	50'	0.38	\$ 12.20
3/4"	2-Wire	1.280	250#	50'	0.52	13.86
1"	2-Wire	1.530	250#	50'	0.77	21.35



(Series 1334)

AVAILABLE IN STANDARD LENGTHS ONLY

Non-Conductive Steam Hose

Service: Flexible moderate pressure steam hose designed for use in industries where steel wire braids are not suitable because of electrical conductivity. Max operating temperature: 338°F.

Construction: Heat resistant Red EPDM tube and Red cover reinforced with spiral plies of high tensile fiberglass.

I.D.	Ply	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
1/2"	4	1.020	100#	50/100'	0.34	\$ 17.60
3/4"	4	1.270	100#	50/100'	0.45	20.40
1"	4	1.520	100#	50/100'	0.56	22.70
1 1/4"	4	1.820	100#	50/100'	0.75	32.08
1 1/2"	4	2.070	100#	50/100'	0.87	33.78
2"	4	2.570	100#	50/100'	1.11	42.40



(Series 1350)

AVAILABLE IN STANDARD LENGTHS ONLY

#100 Steam Cleaner Hose

Service: Medium pressure, flexible hose for steam cleaning operations and saturated steam use to 325°F. Can also handle 3000# W/P cold water.

Construction: Tube specifically compounded for resistance to cleaning agents and detergents. Reinforced with braided steel wire. Heat resistant Black cover.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
3/8"	1-Wire	.690	100#	500'	0.23	\$ 5.82
1/2"	1-Wire	.830	100#	500'	0.31	7.74



(Series 1320)

LESS 10% FULL REELS



800-852-1855



www.abbottrubber.com

Food Hose

Food Suction Hose

Service: Flexible hose for conveying beverages and product under vacuum or low pressure discharge where wire is needed to prevent collapsing under vacuum or small bending radius.

Temperature range:
-25°F to 230°F.

Construction: White Nitrile FDA/USDA/3-A sanitary tube reinforced with fabric plies and a steel wire helix. White cover, also available in Gray cover.

I.D.	O.D.	W/P		Bend Radius	Weight Ft	Price/Ft
		@70°F	Vacuum			
3/4"	1.200	150#	29.0	2.0	0.47	\$ 17.08
1"	1.440	150#	29.0	3.0	0.57	16.44
1 1/4"	1.700	150#	29.0	4.0	0.69	19.42
1 1/2"	1.970	150#	29.0	4.0	0.86	21.48
2"	2.530	150#	29.0	5.0	1.23	27.30
3"	3.600	150#	29.0	7.0	2.16	38.32
4"	4.640	150#	29.0	10.0	3.05	49.52



Available Colors



(Series 1530)

LESS 10% FULL COILS - 100 FT.

Corrugated Food Suction Hose

Service: Flexible, corrugated hose with pretzel-like agility for conveying beverages and product under vacuum or low pressure discharge where maximum flexibility is required. Temperature range: -25°F to 200°F.

Construction: White Nitrile FDA/USDA/3-A sanitary tube reinforced with fabric plies and a steel wire helix. White cover, also available in Gray cover.

I.D.	O.D.	W/P		Bend Radius	Weight Ft	Price/Ft
		@70°F	Vacuum			
2"	2.440	150#	29.0	2.0	1.05	\$ 47.36
3"	3.560	150#	29.0	3.0	2.07	74.06
4"	4.590	150#	29.0	4.0	3.92	101.92



Available Colors



(Series 1534)

LESS 10% FULL COILS - 100 FT.

Food Discharge Hose

Service: Used for conveying hot water and cold beverages, wine, vinegar or other products where FDA requirements are needed. Temperature range: -20°F to 200°F.

Construction: White Nitrile FDA/USDA/3-A sanitary tube reinforced with fabric plies. Abrasion resistant cover.

I.D.	Ply	O.D.	W/P		Weight
			@70°F	Ft	
3/4"	2	1.210	150#	0.41	\$ 13.55
1"	4	1.590	150#	0.64	14.94
1 1/2"	4	2.090	150#	0.93	20.72
2"	4	2.570	150#	1.25	37.78
3"	4	3.640	100#	5.43	39.44



USA

(Series 1540)

LESS 10% FULL COILS - 100 FT.

PVC Milk & Food Hose

Service: High quality hose for milk, food processing, or conditions requiring see-through flow. Complies with the criteria of FDA/USDA/3-A. Temperature range: 15°F to 140°F.

Construction: Clear flexible PVC material with Clear or White PVC Helix.

I.D.	O.D.	W/P		Bend Radius	Weight Ft	Price/Ft
		@70°F	Vacuum			
1 1/2"	1.780	90#	29.0	6.0	0.43	\$ 6.08
2"	2.370	80#	29.0	3.0	0.57	9.28
2 1/2"	2.890	65#	29.0	10.0	0.89	13.48
3"	3.480	65#	29.0	12.0	1.15	15.34
4"	4.500	55#	29.0	16.0	1.65	26.96



USA

Clear (Series 1550)

Clear/White (Series 1560)

LESS 10% FULL COILS - 100 FT.



Food Hose

Clear Braid FDA Suction/Transfer Hose

Service: Clear reinforced FDA and 3-A non-toxic suction and discharge hose for bottling, wine making, canning, dairy, brewing and liquid foods. Temperature range: 13°F to 140°F.

Construction: FDA and 3-A non-toxic specification flexible PVC, smooth bore, synthetic braiding and a corrugated O.D.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
1½"	2.030	110#	28.0	2.5	0.56	\$ 8.72
2"	2.600	100#	28.0	4.0	0.75	10.96
3"	3.700	100#	28.0	6.3	1.20	14.64
4"	4.780	75#	28.0	7.1	1.74	23.65



(Series 1580)


LESS 10% FULL COILS - 100 FT.

Braided FDA Silicone Hose

Service: Designed for food and beverage machinery. Conveys liquids under pressure at high or low operating temperatures. Temperature range: -65°F to 350°F.

Construction: White translucent FDA and NSF-51 silicone tube reinforced with braided polyester. Translucent silicone cover.

I.D.	Braid	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
3/16"	1	.447	200#	100'	0.07	\$ 8.12
1/4"	1	.520	200#	100'	0.09	8.26
5/16"	1	.592	175#	100'	0.11	10.92
3/8"	1	.655	150#	100'	0.13	10.08
1/2"	1	.800	125#	100'	0.17	13.32
5/8"	1	.965	100#	50'	0.23	18.00
3/4"	1	1.100	75#	50'	0.28	18.54
1"	1	1.380	75#	50'	0.36	33.98

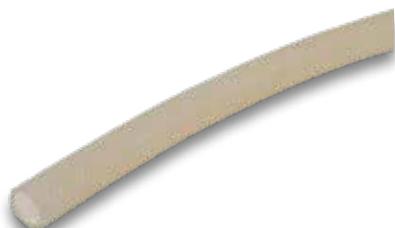

(Series 4075)

AVAILABLE IN STANDARD LENGTHS ONLY

Hot Edible Oil Hose

Service: Hot edible liquid transfer which will not impair taste. Excellent for service with hot oil, fat filters and fryers. Temperature range: up to 350°F, 275°F constant.

Construction: White, FDA sanitary Nitrile tube, wire braid reinforcement. Gray FDA Nitrile cover.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
1/2"	1-Wire	1.020	250#	350'	0.48	\$ 8.36
5/8"	1-Wire	1.140	250#	350'	0.53	9.72
3/4"	1-Wire	1.265	250#	350'	0.60	11.20



(Series 1545)

LESS 15% FULL REELS

FDA Rubber Materials Handling Hose

Service: A smooth bore suction and discharge hose designed for abrasives such as grains, flour and pellet transfer. Suitable for wet or dry. Temperature range: -20°F to 180°F.

Construction: 3/16" thick white, FDA grade, natural rubber tube. Reinforced with a high tensile steel wire helix and textile cords. Green SBR/EPDM abrasion and ozone resistant cover.

I.D.	Ply	O.D.	W/P @70°F	Coil	Weight Ft	Price/Ft
2"	2	2.640	150#	100'	1.22	\$ 22.52
2½"	2	3.400	150#	100'	1.80	35.18
3"	2	3.620	150#	100'	1.88	32.05
4"	2	4.650	150#	50/100'	2.56	42.02
5"	2	5.710	75#	20/50'	3.79	63.00
6"	2	6.690	75#	20/50'	4.66	74.16
8"	2	8.780	75#	20'	7.01	121.35



LESS 10% FULL COILS THRU 4" I.D.

(Series 1650)



800-852-1855



www.abbotrubber.com

Food Hose

Clear PVC Food Handling Hose

	I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
Service: Designed for bulk handling and conveying material such as resin, pellet, granular, or powder materials, as well as liquid, solid or semi-solid food products.	1"	1.300	55#	28.0	2.0	50/100'	0.21	\$ 3.72
	1¼"	1.600	50#	28.0	2.0	50/100'	0.28	4.42
	1½"	1.920	50#	28.0	3.0	50/100'	0.35	5.20
	45MM	2.090	45#	28.0	4.0	50'	0.44	7.70
	2"	2.400	40#	28.0	4.0	50/100'	0.56	7.06
	57MM	2.680	40#	28.0	4.5	50'	0.64	10.20
	2½"	2.990	40#	28.0	5.0	50/100'	0.77	10.88
Construction: Clear, flexible, and highly abrasion resistant FDA and 3-A PVC with a clear rigid spiral reinforcement. Smooth bore and convoluted cover for flexibility.	3"	3.640	40#	28.0	6.0	50/100'	1.10	14.04
	3½"	4.210	35#	28.0	8.0	50/100'	1.48	23.74
	4"	4.720	35#	24.0	10.0	50/100'	1.80	24.36
	5"	5.740	30#	24.0	16.0	20/50/100'	2.34	40.98
	6"	6.910	30#	24.0	18.0	20/50/100'	3.70	46.65
	8"	8.970	20#	20.0	36.0	20/50'	5.53	65.00



(Series 1610)

LESS 10% FULL COILS SIZES 1" I.D. THRU 6" I.D. ONLY

Clear Static Wire PVC Food Handling Hose

	I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
Service: Designed for bulk handling and conveying material such as resin, pellet, granular, or powder materials, as well as liquid, solid or semi-solid food products.	1¼"	1.650	50#	28.0	2.0	50/100'	0.33	\$ 9.32
	1½"	1.930	50#	28.0	3.0	50/100'	0.43	9.70
	45MM	2.200	45#	28.0	4.0	60'	0.46	12.28
	2"	2.480	40#	28.0	4.0	50/100'	0.58	13.40
	57MM	2.760	40#	28.0	4.5	60'	0.64	15.02
	2½"	3.070	40#	28.0	5.0	50/100'	0.89	15.06
Construction: Clear, flexible, and highly abrasion resistant FDA and 3-A PVC with a clear rigid spiral reinforcement and an embedded static wire for grounding. Smooth bore and convoluted cover for flexibility.	3"	3.640	40#	28.0	6.0	50/100'	1.25	21.54
	3½"	4.270	35#	28.0	8.0	50/100'	1.55	29.28
	4"	4.720	35#	24.0	10.0	50/100'	1.93	35.24
	5"	5.740	30#	24.0	16.0	20/50/60'	2.40	53.82
	6"	6.810	30#	24.0	18.0	20/50/60'	3.70	56.00



(Series 1611)

LESS 10% FULL COILS SIZES 1" I.D. THRU 4" I.D. ONLY

Urethane Lined Clear PVC Food Handling Hose

	I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
Service: Designed for pneumatic transfer of powders, pellets and dry food transfer such as flour, rice and grains.	1½"	1.880	50#	29.0	6.0	60'	0.48	\$ 14.70
Temperature range: -5°F to 150°F.	2"	2.440	40#	29.0	7.0	60'	0.67	20.25
	2½"	3.120	40#	29.0	8.0	60'	0.92	24.50
	3"	3.700	40#	29.0	9.0	60'	1.35	32.62
Construction: FDA and 3-A polyurethane liner with a clear convoluted PVC cover. Features an embedded static wire for grounding.	4"	4.800	35#	29.0	15.0	20/60'	2.17	52.32
	5"	5.810	35#	28.0	23.0	20/60'	2.77	79.18
	6"	6.930	30#	28.0	26.0	20/60'	3.90	97.34
	7"	8.080	30#	28.0	30.0	20/60'	5.20	129.24
	8"	9.280	30#	28.0	36.0	20'	6.65	161.04



(Series 1615)

AVAILABLE IN STANDARD LENGTHS ONLY



Petroleum Hose

Oil Suction/Discharge Hose

Service: For bulk transfer of gasoline and fuel oils and other petroleum products by discharge or full suction. Temperature range: -35°F to 200°F.

Construction: Black Nitrile tube with spiral steel wire helix between synthetic textile plies. Black oil resistant Nitrile/PVC cover. Also available with Red cover.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
1"	1.470	150#	29.0	2.5	0.58	\$ 12.60
1¼"	1.720	150#	29.0	3.0	0.73	13.42
1½"	1.970	150#	29.0	4.0	0.86	14.24
2"	2.470	150#	29.0	5.0	1.11	16.00
2½"	3.030	150#	29.0	6.0	1.56	23.82
3"	3.570	150#	29.0	8.0	2.00	25.52
4"	4.590	150#	29.0	12.0	2.71	33.44
6"	6.760	150#	29.0	24.0	5.72	64.88

LESS 10% FULL COILS - 100 FT.



Available Colors

CANADA

(thru 4" ID)

(Series 1730)

Service: An extremely flexible and lightweight drop hose for bulk transfer of diesel, ethanol, gasoline, oil and petroleum products by discharge or full suction. Temperature range: -25°F to 200°F.

Construction: Black Nitrile tube with spiral steel wire helix between synthetic textile plies. Black oil resistant Nitrile/PVC corrugated cover.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
¾"	1.200	250#	29.0	0.8	0.44	\$16.10
1"	1.460	250#	29.0	1.0	0.55	16.82
1½"	1.910	250#	29.0	1.5	0.73	18.30
2"	2.430	250#	29.0	2.0	0.96	21.78
2½"	3.000	200#	29.0	2.5	1.41	27.46
3"	3.600	200#	29.0	3.0	1.69	31.38
4"	4.560	150#	29.0	4.0	2.42	39.92
6"	6.620	150#	29.0	6.0	4.43	92.10

LESS 10% FULL COILS - 100 FT.



Available Colors

CANADA

(thru 4" ID)

(Series 1738)

Service: For use in tank truck and in-plant operation to transfer diesel, biodiesel blends, B-100, ethanol blends, gasoline, oil and petroleum based products up to 60% aromatic content. Temperature range: -30°F to 180°F.

Construction: Black oil resistant synthetic rubber (static dissipating) reinforced with synthetic plies and wire helix. Black oil resistant and abrasion resistant cover.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
1½"	2.030	150#	29.0	4.0	0.92	\$ 16.88
2"	2.550	150#	29.0	5.0	1.21	18.24
2½"	3.070	150#	29.0	6.0	1.56	24.48
3"	3.580	150#	29.0	7.0	1.94	32.52
4"	4.600	150#	29.0	10.0	2.53	39.42

LESS 10% FULL COILS - 100 FT.



CANADA

(thru 4" ID)

(Series 1734)

Service: Used for transfer of fuel oils in residential, commercial, and industrial service. Temperature range: -40°F to 140°F.

Construction: Nitrile, oil resistant tube. Braided synthetic cord reinforcement. Red non-marking, oil, abrasion and weather resistant cover.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
1"	2	1.500	250#	500'	0.57	\$ 12.68
1¼"	2	1.800	250#	400'	0.65	14.72
1⅓"	2	1.880	250#	400'	0.70	14.90
1½"	2	2.100	150#	300'	0.92	18.20

LESS 10% FULL REELS



USA

(thru 4" ID)

(Series 1710)



800-852-1855



www.abbottrubber.com

Petroleum Hose

Softwall Gasoline Curb Pump Hose

Service: For dispensing gasoline or diesel fuel from pump. UL listed. Softwall construction. Temperature range: -40°F to 140°F.

Construction: Gasoline resistant Nitrile tube, braided high-tensile reinforcement with static wire. Black oil, abrasion and weather resistant cover. Available with aluminum males permanently attached.

I.D.	Braid	O.D.	W/P @70°F	Weight Ft	Price/Ft	Cplgs./Pr.
3/4"	1	1.130	50#	0.32	\$ 4.12	\$ 28.00
1"	2	1.500	50#	0.55	7.65	39.00



(Series 1720)

LESS 10% FULL COILS - 500 FT.

Hardwall Gasoline Curb Pump Hose

Service: For dispensing gasoline or diesel fuel from pump. UL listed. Hardwall construction. Temperature range: -40°F to 140°F.

Construction: Gasoline resistant Nitrile tube, braided high-tensile reinforcement and wire braid with static wire. Black oil, abrasion and weather resistant cover. Available with aluminum males permanently attached.

I.D.	Braid	O.D.	W/P @70°F	Weight Ft	Price/Ft	Cplgs./Pr.
5/8"	1-Wire	1.000	50#	0.40	\$ 5.45	\$ 27.00
3/4"	1-Wire	1.130	50#	0.67	6.24	28.00
1"	1-Wire	1.380	50#	0.91	9.25	39.00



(Series 1725)

LESS 10% FULL COILS - 500 FT.

Tank Truck Drop Hose

Service: Recommended for transferring gasoline and other petroleum base products under low pressure, gravity flow, or suction. Maximum aromatic content 60%. Remains flexible to -10°F.

Construction: Black Nitrile/PVC rubber tube reinforced with fabric. Synthetic cover with an outer thermoplastic helix. Static wire included for grounding.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
2"	2.600	75#	23.0	5.0	20/100'	0.80	\$ 17.24
3"	3.690	65#	23.0	6.0	20/100'	1.24	22.00
4"	4.780	65#	23.0	8.0	20/100'	2.00	31.28

Size	Length	Price/Ea
2"	PVC Banding Sleeve	36"
3"	PVC Banding Sleeve	36"
4"	PVC Banding Sleeve	36"



AVAILABLE IN STANDARD LENGTHS ONLY


(Series 1760)

Petroleum Vapor Recovery Hose

Service: Designed for recovering gasoline vapor in tank unloading at bulk terminals or at service stations. Flexible and lightweight, resists gasoline, ozone, weathering and abrasion. Temperature range: -30°F to 140°F.

Construction: Clear polyurethane with a bright Yellow PVC helix. Static wire included for grounding.

I.D.	O.D.	W/P @70°F	Bend Radius	Length	Weight Ft	Price/Ft
2"	2.460	17#	3.0	100'	0.51	\$ 13.14
2½"	2.960	17#	3.0	100'	0.61	16.58
3"	3.500	15#	3.5	100'	0.78	17.64
4"	4.610	10#	4.5	100'	1.10	26.46
5"	5.510	8#	5.0	100'	1.13	39.98
6"	6.520	7#	6.0	100'	1.24	48.86

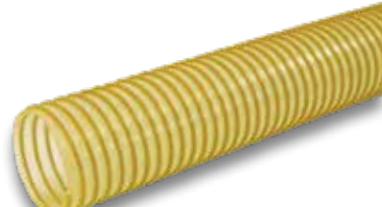

(Series 1775)

AVAILABLE IN STANDARD LENGTHS ONLY

Petroleum Hose

Composite Petroleum Hose

Service: Extremely flexible composite type hose for tank truck, bottom loading, railcar and in-plant applications. Temperature range: to 212°F.

Construction: Multiple layers of polypropylene films and fabrics reinforced with inner and outer galvanized steel wire. Blue PVC impregnated polyester outer cover. Maximum length - 65 ft.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
1"	1.500	250#	29.0	4.9	0.65	On Application
1½"	2.000	250#	29.0	5.9	1.15	On Application
2"	2.500	250#	29.0	7.9	1.20	On Application
3"	3.500	250#	29.0	11.8	2.35	On Application
4"	4.500	250#	29.0	15.7	3.65	On Application
6"	7.000	250#	29.0	22.6	8.25	On Application
8"	9.400	250#	29.0	31.5	14.55	On Application
10"	12.000	250#	29.0	39.4	17.80	On Application
12"	14.400	200#	29.0	47.3	21.10	On Application



(Series 1790)

COMPLETE COUPLING SERVICE AVAILABLE

Acid & Chemical Hose

Acid/Chemical Suction Hose

Service: Versatile chemical transfer hose. Handles 90% of all known chemicals plus solvents, acids, alkalies, oils and fuels to 150°F.

Construction: Special UHMWPE cross-linked polyethylene tube reinforced with plied cord, steel wire helix. Green corrugated abrasion resistant cover.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
3/4"	1.220	200#	29.0	4.0	0.46	\$ 19.40
1"	1.470	200#	29.0	4.0	0.60	19.62
1½"	1.970	200#	29.0	5.0	0.84	24.68
2"	2.550	200#	29.0	6.0	1.22	29.00
3"	3.630	200#	29.0	9.0	2.11	46.78
4"	4.670	200#	29.0	10.0	2.81	65.55



(Series 1460)

High Temperature Acid/Chemical Suction Hose

Service: For transfer of a variety of chemicals where a higher temperature is required. Temperature range: -40°F to 250°F.

Construction: Special modified cross linked polyethylene tube reinforced with two spiral plies and a double wire helix. Special Black EPDM cover with a White stripe.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
1"	1.450	200#	29.0	3.0	0.53	\$ 25.16
1½"	1.950	200#	29.0	4.0	0.74	27.50
2"	2.540	200#	29.0	5.0	1.16	32.12
3"	3.590	200#	29.0	8.0	1.82	64.20



(Series 1468)

LESS 10% FULL COILS - 100 FT.

FEP Lined Acid/Chemical Suction Hose

Service: Used for applications requiring chemical inertness, non-stick, non-aging characteristics. Handles acids, chemicals, solvents, foods, pharmaceuticals, glues, paints and lacquers. Temperature range: -40°F to 300°F.

Construction: FDA/USDA compliant FEP inner core bonded to textile braid reinforcement with steel wire helix for support and full suction. Blue EPDM cover. Special stainless or encapsulated fittings available.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
3/4"	1.110	200#	29.0	5.0	0.56	\$ 63.94
1"	1.520	200#	29.0	8.0	0.71	77.98
1¼"	1.730	200#	29.0	11.0	0.84	108.08
1½"	2.130	200#	29.0	14.0	1.24	114.80
2"	2.690	200#	29.0	18.0	1.71	167.46
3"	3.670	200#	29.0	35.0	2.52	220.35



(Series 1450)

LESS 10% FULL COILS - 100 FT.



800-852-1855



www.abbottrubber.com

Acid & Chemical Hose


Viton® Acid Chemical Suction Hose

Service: Suction and discharge hose designed to convey a wide range of chemicals, solvents, and aromatic hydrocarbons.

Temperature range: -20°F to 250°F.

Construction: Viton® tube reinforced with plied fabric and steel wire helix. Weather and abrasion resistant Orange Nitrile cover.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
1"	1.440	150#	29.0	4.0	0.61	\$ 57.72
1½"	1.970	150#	29.0	4.0	0.95	102.64
2"	2.580	150#	29.0	5.0	1.45	135.42
3"	3.590	150#	29.0	7.0	2.26	172.75
4"	4.690	150#	29.0	10.0	3.31	229.78



(Series 1412)

AVAILABLE IN STANDARD LENGTHS ONLY - 100 FT.

Pure Gum Acid Discharge Hose

Service: Used to convey a wide range of inorganic acids and alkali solutions under pressure. Temperature range: -30°F to 190°F.

Construction: Tan pure gum tube, plies of rayon cord and synthetic abrasion resistant cover. Also available with 3/16" Hypalon®, EPDM or chloro-polyethylene tube.

I.D.	Ply	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
1¼"	2	2.250	150#	50'	1.28	On Application
1½"	2	2.437	150#	50'	1.44	On Application
2"	2	2.937	150#	50'	1.83	On Application



(Series 1420)

AVAILABLE IN STANDARD LENGTHS ONLY

PTFE Lined Stainless Steel Hose

Service: Flexible hose for conveying acids, hydraulic fluids, steam, fuels, foods, and chemicals. Temperature range: -65°F to 450°F.

Construction: Inner core of extruded PTFE, stainless steel braided cover. Permanent or field reusable fittings available in brass, steel, and stainless steel. Spring guards also available.

Size Dash	Size	O.D.	Braid	W/P @70°F	Bend Radius	Weight Ft	Price/Ft
-03	⅛"	.250	1-Wire	3000#	1.5	0.05	On Application
-04	⅜"	.320	1-Wire	3000#	1.7	0.08	On Application
-05	¼"	.375	1-Wire	3000#	2.5	0.10	On Application
-06	⅝"	.435	1-Wire	2500#	3.5	0.11	On Application
-08	⅝"	.565	1-Wire	2000#	5.0	0.13	On Application
-10	½"	.656	1-Wire	1750#	6.0	0.15	On Application
-12	⅝"	.780	1-Wire	1200#	7.0	0.16	On Application
-16	⅜"	1.050	1-Wire	1000#	9.0	0.27	On Application



(Series 1440)

COMPLETE COUPLING SERVICE AVAILABLE

Convoluted PTFE Lined Stainless Steel Hose Assembly

Service: Convoluted PTFE bore, stainless steel braided cover hose for flexibility. Handles a variety of chemical and industrial applications. Temperature range: -65°F to 450°F.

Construction: Flared-thru PTFE tube, 304SS overbraid supplied with 304SS floating flanges both ends. Maximum length - 25 Ft.

Size Dash	Size	O.D.	Braid	W/P @70°F	Bend Radius	Weight Ft	Price/Ft
-06	⅛"	.560	1-Wire	1500#	2.0	0.14	On Application
-08	⅜"	.750	1-Wire	1500#	3.0	0.16	On Application
-12	⅝"	1.010	1-Wire	1200#	3.0	0.27	On Application
-16	½"	1.300	1-Wire	1000#	4.0	0.37	On Application
-20	1⅓"	1.570	1-Wire	750#	4.5	0.46	On Application
-24	1⅝"	1.890	1-Wire	650#	4.5	0.55	On Application
-32	2"	2.380	1-Wire	450#	5.0	0.90	On Application



(Series 1470)

COMPLETE COUPLING SERVICE AVAILABLE



Acid & Chemical Hose

Composite Chemical Hose

Service: Extremely flexible composite type hose chemical unloading and in-plant applications. Temperature range: to 212°F.

Construction: Multiple layers of polypropylene films and fabrics reinforced with a polypropylene coated inner wire and an outer galvanized out wire. Black PVC impregnated polyester outer cover. Also available with stainless steel wire and FEP liner. Maximum length - 65 ft.

I.D.	O.D.	W/P @70°F		Bend Radius	Weight Ft	Price/Ft
		Vacuum	250#			
1"	1.500	250#	29.0	4.9	0.65	On Application
1½"	2.000	250#	29.0	5.9	1.15	On Application
2"	2.500	250#	29.0	7.9	1.20	On Application
3"	3.500	250#	29.0	11.8	2.35	On Application
4"	4.500	250#	29.0	15.7	3.65	On Application
6"	7.000	250#	29.0	22.6	8.25	On Application
8"	9.400	250#	29.0	31.5	14.55	On Application



(Series 1490)

COMPLETE COUPLING SERVICE AVAILABLE

Vacuum & Materials Handling Hose

Clear Braid Urethane Lined PVC Vacuum Hose

Service: High abrasion resistant "see through" FDA material handling hose for dry transfer of powder, pellets, flour, grains, etc. Temperature range: 40°F to 150°F.

Construction: Food grade polyurethane liner, smooth, reinforced with polyester yarn. Blue PVC Helix for abrasion resistance. Static wire prevents build-up of static electricity.

I.D.	O.D.	W/P @70°F		Bend Radius	Length	Weight Ft	Price/Ft
		Vacuum	250#				
3"	3.780	70#	29.0	10.0	20/50/100'	1.20	\$ 32.62
4"	4.840	65#	29.0	12.0	20/50/100'	1.60	52.32
5"	5.790	45#	28.0	14.0	20/25/50'	2.45	79.18
6"	6.930	40#	28.0	16.0	20/25/50'	2.86	97.34



(Series 1618)

AVAILABLE IN STANDARD LENGTHS ONLY

Hi-Vacuum Plastic Vacuum Hose

Service: An all plastic, highly flexible, crushproof, non-kinking and lightweight hose. Temperature range: -40°F to 150°F.

Construction: Spiral welded. Pliable yellow smooth interior. Tough, abrasion resistant black plastic ribs. Furnished with vinyl cuffs permanently attached to each end.

I.D.	O.D.	W/P @70°F		Bend Radius	Weight Ft	Price/Ft
		Vacuum	250#			
1½"	2.170	20#	29.8	2.3	0.60	\$ 6.20
2"	2.760	15#	29.8	3.5	0.85	8.50
3"	4.060	7#	29.8	6.5	1.60	14.20
4"	5.620	5#	29.8	8.0	3.30	25.50



(Series 1230)

AVAILABLE IN INCREMENTS OF 5 FT - 10 FT TO 50 FT MAXIMUM

Flexible Metal Vacuum Hose - Lined

Service: Designed for pneumatic transfer of dry materials such as grains, powder, pellets or any other application requiring high abrasion and temperature. Temperature range: up to 750°F.

Construction: Medium weight, .015" thick stainless steel liner interlocked for high flow rates. Packing available to customer requirements.

I.D.	Vacuum	Bend Radius	Maximum Length	Weight Ft	Price/Ft
2"	29.8	9.0	25'	1.50	On Application
2½"	29.8	10.0	25'	1.80	On Application
3"	29.8	12.5	25'	2.50	On Application
3½"	29.8	13.0	25'	3.00	On Application
4"	29.8	16.0	25'	3.40	On Application
4½"	29.8	17.0	25'	3.80	On Application
5"	29.8	19.0	25'	4.20	On Application
6"	29.8	23.0	25'	5.10	On Application
8"	29.8	30.0	25'	7.50	On Application



Galvanized (Series 2440)
Stainless Steel (Series 2450)

COMPLETE COUPLING SERVICE AVAILABLE



800-852-1855



www.abbotrubber.com

Vacuum & Materials Handling Hose

Abrasion Resistant Suction Hose

Service: Ideal for dry material handling such as crushed rock, sand, gravel, cement, powder, iron ore, grains and any other substance where high abrasion is a factor. Temperature range: -40°F to 140°F.

Construction: Smooth bore. Black special abrasion resistant compound supported by a rigid PVC helix. Static dissipating. Corrugated cover. Also available with static wire.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
1 1/4"	1.570	45#	29.8	2.0	100'	0.31	\$ 5.30
1 1/2"	1.820	45#	29.8	2.0	100'	0.37	5.96
2"	2.350	40#	29.8	2.5	100'	0.50	9.66
2 1/2"	2.950	35#	29.8	2.5	100'	0.88	12.34
3"	3.500	35#	29.8	3.0	100'	1.10	16.32
3 1/2"	4.110	30#	29.8	4.0	100'	1.35	25.64
4"	4.630	30#	29.8	4.5	50/100'	1.77	26.82
5"	5.760	30#	28.0	5.0	50/100'	2.47	40.74
6"	6.730	30#	28.0	9.2	50/100'	3.08	51.82
7"	7.830	30#	27.0	14.0	50'	4.10	65.12
8"	9.040	30#	27.0	15.0	50'	5.65	86.30
10"	11.180	28#	25.0	30.0	20'	8.88	122.00
12"	13.310	25#	25.0	40.0	20'	10.43	151.90

LESS 15% FULL COILS - SIZES 1 1/4" I.D. THRU 8" I.D. ONLY



(Series 1630)

High Temp Abrasion Resistant Suction Hose

Service: Heavy duty suction hose for applications where higher temperature and abrasion are factors such as handling fly ash, crushed rock, sand, pea gravel or cement powder. Temperature range: -40°F to 220°F.

Construction: EPDM rubber supported with a steel wire helix and a polyethylene outer helix.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
4"	4.690	30#	29.8	5.5	50/100'	1.75	\$ 24.12
6"	6.830	30#	28.0	9.8	50/100'	3.46	46.50
8"	9.130	30#	27.0	15.0	50'	6.00	83.72

AVAILABLE IN STANDARD LENGTHS ONLY



(Series 1632)

Abrasion Resistant Blower Hose

Service: Designed for handling insulation, rockwool, fiberglass, sawdust, grain, cement dust or any other lightweight abrasive materials that can be moved by air pressure. Temperature range: -40°F to 140°F.

Construction: Smooth bore. Black special abrasion resistant compound supported by a rigid PVC helix. Static dissipating. Corrugated cover.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
2 1/2"	2.910	18#	25.0	2.5	100'	0.71	\$ 8.82
3"	3.440	13#	23.0	3.0	100'	0.92	11.36
4"	4.530	10#	20.0	4.0	50/100'	1.50	19.78
5"	5.630	8#	15.0	5.0	50/100'	1.68	26.42
6"	6.670	8#	15.0	9.0	50/100'	2.40	33.98
8"	8.980	8#	15.0	12.0	50'	4.40	55.14

LESS 15% FULL COILS



(Series 1640)

Rubber Industrial Vacuum Hose

Service: For heavy duty vacuum cleaning equipment in all types of industries. Temperature range: -20°F to 150°F.

Construction: Smooth rubber tube with spiral wire and fabric ply reinforcement. Black corrugated rubber cover for flexibility and abrasion resistance.

I.D.	O.D.	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
1"	1.375	20.0	3.0	50'	0.40	\$ 17.45
1 1/4"	1.625	20.0	4.0	50'	0.40	16.04
1 1/2"	1.875	20.0	5.0	50'	0.50	16.82
2"	2.375	20.0	8.0	50'	0.70	20.45
2 1/2"	2.875	20.0	8.0	50'	0.80	24.50
3"	3.375	15.0	9.0	50'	0.90	26.92
4"	4.375	15.0	12.0	50'	1.90	34.62

LESS 10% FULL COILS



(Series 1830)



Vacuum & Materials Handling Hose

Plastic Vacuum Hose

Service: Lightweight, all plastic heavy duty hose for air, gases, dust, fumes or liquid by suction, gravity or pressure.

Temperature range:
-40°F to 150°F.

Construction: Non-wire interlocking: allows hose to be crush resistant. Smooth vinyl screw-on end cuffs available most sizes. Color - Gray.

I.D.	O.D.	Vacuum	Bend	Length	Weight	Price/Ft	Cuff/Ea
			Radius				
1/2"	.725	29.0	1.3	50'	0.07	\$ 2.75	\$ ----
5/8"	.875	29.0	1.5	50'	0.09	2.90	-----
3/4"	1.000	29.0	2.3	50'	0.12	2.92	-----
1"	1.300	29.0	3.5	50'	0.18	3.04	5.25
1 1/4"	1.650	29.0	3.8	50'	0.22	3.48	4.00
1 1/2"	1.900	29.0	5.0	50'	0.34	4.25	5.00
2"	2.500	20.0	5.5	50'	0.48	5.60	8.00



(Series 1810)

Commercial Plastic Vacuum Hose

Service: For truck mounted or portable extraction units, car wash vacuums or industrial wet or dry vacuum applications.

Temperature range:
-40°F to 150°F.

Construction: Crushproof and non-kinking plastic spiral with smooth interior for maximum flow. No shrinkage under high vacuum. Colors: Gray/Black, Blue/Black, or Orange/Black.

I.D.	O.D.	Vacuum	Bend	Length	Weight	Price/Ft	Cuff/Ea
			Radius				
1 1/2"	1.800	29.0	2.3	50'	0.32	\$ 3.20	\$ 5.00
2"	2.400	29.0	3.3	50'	0.47	4.25	8.00



(Series 1820)

AVAILABLE IN STANDARD LENGTHS ONLY

PVC Wire-Inserted Vacuum Hose

Service: For commercial or industrial vacuum cleaners, cooling, ventilating, and dust. Temperature range:
-65°F to 150°F.

Construction: Coated spring steel wire with two plies of PVC reinforced by yarns of high strength polyester fibers applied longitudinally and radially. Screw-on end cuffs available most sizes. Color Gray.

I.D.	O.D.	Vacuum	Bend	Length	Weight	Price/Ft	Cuff/Ea
			Radius				
1 1/4"	1.500	27.0	.88	50'	0.31	\$ 4.05	\$ 5.50
1 1/2"	1.750	26.0	1.12	50'	0.38	4.65	5.50
2"	2.350	25.0	1.63	50'	0.57	5.80	14.50
2 1/2"	2.850	24.0	2.19	50'	0.75	8.00	16.00
3"	3.400	24.0	2.48	25'	0.85	8.94	18.50



(Series 1840)

Heavy Duty Air Transfer/Vacuum Hose

Service: Handles a wide range of applications including dust collection, material handling, venting and fume control. Temperature range:
30°F to 180°F.

Construction: Smooth Gray PVC, flexible, supported by a rigid PVC helix. Convoluted on outside for flexibility. Screw-on cuffs available most sizes.

I.D.	O.D.	@70°F W/P	Bend	Length	Weight	Price/Ft
			Radius			
1"	1.200	37#	29.8	2.5	100'	0.13
1 1/4"	1.490	37#	29.8	3.3	100'	0.22
1 1/2"	1.750	35#	29.8	3.8	100'	0.26
2"	2.310	30#	29.8	5.5	100'	0.46
2 1/2"	2.870	30#	29.8	7.0	100'	0.62
3"	3.400	30#	29.8	8.0	100'	0.79
4"	4.450	27#	20.0	14.0	100'	1.06
5"	5.500	25#	15.0	20.0	50'	1.41
6"	6.550	20#	10.0	25.0	20/25'	2.22
8"	8.610	15#	10.0	45.0	20/25'	3.15



(Series 1620)

AVAILABLE IN STANDARD LENGTHS ONLY



800-852-1855



www.abbottrubber.com

Exhaust & Ventilation Hose

General Purpose Air Handling Hose

I.D.	Ply	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
2"	2	30#	28.0	3.5	12.5' / 25'	0.22	\$ 9.70
2½"	2	30#	28.0	4.0	12.5' / 25'	0.28	10.98
3"	2	25#	27.0	5.0	12.5' / 25'	0.33	11.65
3½"	2	24#	26.0	5.7	12.5' / 25'	0.42	12.54
4"	2	23#	25.0	6.5	12.5' / 25'	0.48	13.86
4½"	2	22#	22.0	7.0	12.5' / 25'	0.55	15.50
5"	2	22#	18.0	7.5	12.5' / 25'	0.61	14.88
5½"	2	21#	16.0	8.0	12.5' / 25'	0.75	16.88
6"	2	21#	14.0	9.0	12.5' / 25'	0.70	17.54
7"	2	20#	12.0	9.5	12.5' / 25'	0.92	20.96
8"	2	19#	10.0	10.0	12.5' / 25'	1.04	22.72
10"	2	18#	5.0	11.0	25'	1.36	29.44
12"	2	17#	3.0	13.5	25'	1.85	35.10
14"	2	16#	2.0	15.5	25'	2.10	38.56
16"	2	15#	2.0	18.5	25'	2.40	45.84
18"	2	6#	1.0	22.0	25'	2.70	56.08
20"	2	4#	.07	24.0	25'	3.00	69.24

Service: Flexible ducting for low pressure air movement, dust collection, smoke, fume removal and airborne particle transfer.

Temperature range:
-40°F to 250°F.

Construction: Black 2-ply Neoprene coated polyester fabric with steel wire helix. Special end finishes and wearstrip available. Also available in Blue.



(Series 2510)

AVAILABLE IN STANDARD LENGTHS ONLY

TPR Multi-Purpose Ducting Hose

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
2"	1.750	17#	29.0	3.5	25/50'	0.24	\$ 5.76
2½"	2.770	13#	28.0	4.0	25/50'	0.29	6.88
3"	3.270	10#	28.0	4.3	25/50'	0.32	7.48
3½"	3.770	10#	20.0	5.3	25/50'	0.41	8.88
4"	4.290	10#	25.0	6.5	25/50'	0.50	9.32
4½"	4.790	9#	20.0	7.5	25/50'	0.55	9.95
5"	5.290	9#	15.0	8.0	25/50'	0.63	9.98
5½"	5.790	8#	10.0	8.4	25/50'	0.80	11.24
6"	6.290	8#	8.0	8.8	25/50'	0.85	11.44
7"	7.350	7#	7.0	10.5	25/50'	0.95	12.78
8"	8.350	6#	6.0	12.0	25/50'	1.20	14.20

Service: New versatile thermoplastic rubber ducting. Chemical, ozone and abrasion resistant.

Temperature range:
-60°F to 275°F.

Construction: Black TPR with a steel wire helix. Also with Orange, Yellow or Blue wearstrip.



(Series 2530)

AVAILABLE IN STANDARD LENGTHS ONLY

White FDA Ducting Hose

I.D.	Ply	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
1½"	2	30#	29.0	1.3	25'	0.20	\$ 14.54
2"	2	30#	29.0	1.7	25'	0.30	14.64
2½"	2	29#	29.0	2.1	25'	0.35	17.46
3"	2	29#	29.0	2.5	25'	0.40	17.55
4"	2	30#	29.0	3.2	25'	0.60	19.60
5"	2	29#	26.0	4.0	25'	0.70	22.88
6"	2	18#	22.0	5.5	25'	1.00	25.54
8"	2	11#	7.0	5.6	25'	1.20	34.64

Service: Excellent hose for clean rooms and laboratories. Complies with FDA regulation.

Temperature range:
-20°F to 325°F.

Construction: White 2-ply acrylic polyester fabric reinforced with a steel wire helix.



(Series 2525)

AVAILABLE IN STANDARD LENGTHS ONLY



Exhaust & Ventilation Hose

High Temperature Air Handling Hose

Service: Lightweight, flexible and flame retardant hose, recommended for handling air or fumes at low pressures at moderately high temperatures to 300°F.

Construction: Black 2-ply fiberglass impregnated with Neoprene. Supported with a bronze coated steel wire helix and fiberglass cord overwrap. Also available in 1-Ply and Neoprene liner for added abrasion resistance.

I.D.	Ply	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
2"	2	24#	20.0	1.9	12'	0.33	\$ 10.28
2½"	2	20#	18.0	2.4	12'	0.40	10.96
3"	2	19#	16.0	3.0	12'	0.52	13.28
3½"	2	18#	14.0	3.4	12'	0.61	14.88
4"	2	16#	13.0	3.9	12'	0.68	15.80
4½"	2	15#	11.0	4.4	12'	0.81	17.92
5"	2	14#	10.0	4.9	12'	1.05	18.46
5½"	2	13#	8.0	5.4	12'	1.11	20.68
6"	2	11#	7.0	5.9	12'	1.30	21.04
7"	2	9#	5.0	6.9	12'	1.46	24.76
8"	2	7#	3.0	7.8	12'	1.48	27.48



(Series 2550)

AVAILABLE IN STANDARD LENGTHS ONLY

Silicone High Temperature Air Handling Hose

Service: Lightweight, flexible and flame retardant hose, recommended for handling air or fumes at low pressures at temperatures to 500°F.

Construction: 2-ply fiberglass impregnated with Red silicone. Supported with a steel wire helix and fiberglass cord overwrap. Also available in 1-Ply and FEP lined for handling corrosive fumes.

I.D.	Ply	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
2"	2	24#	20.0	1.9	12'	0.33	\$ 17.84
2½"	2	20#	18.0	2.4	12'	0.40	21.20
3"	2	19#	16.0	3.0	12'	0.52	24.20
3½"	2	18#	14.0	3.4	12'	0.61	27.38
4"	2	16#	13.0	3.9	12'	0.68	29.76
4½"	2	15#	11.0	4.4	12'	0.81	32.32
5"	2	14#	10.0	4.9	12'	1.05	34.80
5½"	2	13#	8.0	5.4	12'	1.11	38.28
6"	2	11#	7.0	5.9	12'	1.30	41.10
7"	2	9#	5.0	6.9	12'	1.46	47.08
8"	2	7#	3.0	7.8	12'	1.48	52.80



(Series 2560)

AVAILABLE IN STANDARD LENGTHS ONLY

Portable Cooling & Heating Hose

Service: Lightweight and flexible vent hose for use with hot or cold portable heaters, fumes and exhaust. Temperature Range: -20°F to 325°F.

Construction: Single ply acrylic coated polyester fabric reinforced with a steel wire helix and external wearstrip. UL94V-0 flame resistant.

I.D.	Ply	W/P @70°F	Bend Radius	Length	Weight Ft	Price/Ft
8"	1	3#	5.0	25'	0.40	\$ 16.04
10"	1	2#	6.0	25'	0.60	18.30
12"	1	2#	7.5	25'	0.70	22.30
14"	1	1#	8.5	25'	0.80	26.40
16"	1	1#	9.5	25'	0.90	30.68
18"	1	1#	10.5	25'	1.10	37.18
20"	1	1#	11.5	25'	1.20	40.65
24"	1	1#	14.0	25'	1.40	50.65



(Series 2588)

CUSTOM END FINISHES AVAILABLE



800-852-1855



www.abbottrubber.com

Exhaust & Ventilation Hose

Clear PVC Blower Hose

Service: Lightweight dust collection and blower hose. Clear and extremely flexible for fume and dust removal, air and drain lines.

Temperature range: 40°F to 150°F.

Construction: Clear flexible PVC reinforced with a rigid PVC outside helix. Available with polyurethane compound for more abrasive applications. Also available in FDA grade.

I.D.	O.D.	W/P @70°F	Bend Radius	Length	Weight Ft	Price/Ft
1½"	1.820	20#	1.0	50/100'	0.23	\$ 3.64
2"	2.390	15#	2.0	50/100'	0.30	5.50
2½"	2.810	6#	2.5	50/100'	0.37	4.54
3"	3.370	6#	3.0	50/100'	0.54	5.40
4"	4.410	5#	4.0	50/100'	0.71	7.38
5"	5.550	3#	5.0	50/100'	1.00	11.00
6"	6.510	3#	6.0	50/100'	1.29	13.68
7"	7.540	2#	7.0	50/100'	1.38	16.28
8"	8.550	2#	8.0	50'	1.71	18.28

LESS 10% FULL COILS



(Series 1850)

Rubber Duct Blower Hose

Service: Ideally suited for collecting grass, saw dust, wood chips and similar applications.

Temperature range: -40°F to 220°F.

Construction: Black EPDM reinforced with a spring steel helix. Also available with a wear-strip for external abrasion resistance.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
2½"	3.000	12#	9.0	3.0	50'	0.44	\$ 8.05
3"	3.370	12#	8.0	3.0	50'	0.55	8.48
4"	4.390	9#	6.0	4.0	50'	0.73	9.82
5"	5.430	7#	5.0	5.0	50'	0.84	11.14
6"	6.360	6#	4.0	6.0	50'	1.04	16.70
7"	7.320	5#	4.0	7.0	50'	1.17	18.32
8"	8.350	4#	4.0	8.0	50'	1.38	18.88
10"	10.450	3#	4.0	10.0	50'	2.40	25.64
12"	12.400	3#	4.0	12.0	25'	2.50	30.45

LESS 15% FULL COILS



(Series 1860)

PVC Economy Air Handling Hose

Service: An economical and chemical resistant hose for moving a wide range of fumes, gases, vacuum, liquid pick-up or discharge. Temperature range: -20°F to 180°F.

Construction: 2-Ply Non-reinforced PVC with a steel wire helix. Available in Clear or Blue color.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
2"	2.270	36#	29.0	2.8	25/50'	0.30	\$ 4.90
2½"	2.770	28#	25.0	3.3	25/50'	0.33	6.88
3"	3.270	24#	22.0	4.3	25/50'	0.38	7.42
4"	4.290	11#	17.0	5.5	25/50'	0.68	8.40
5"	5.290	10#	14.0	6.8	25/50'	0.73	9.70
6"	6.290	8#	10.0	7.5	25/50'	1.10	9.88
7"	7.350	7#	7.0	9.8	25/50'	1.29	12.52
8"	8.350	7#	6.0	10.5	25/50'	1.42	13.80

AVAILABLE IN STANDARD LENGTHS ONLY



(Series 2590)

Clear Urethane Low-Temp Duct Hose

Service: Lightweight and flexible duct hose that can handle a wide range of applications, especially those requiring abrasion resistance and a wide temperature range. Temperature range: -65°F to 200°F.

Construction: FDA, Clear thermoplastic urethane supported with a steel wire helix. Also available in Black

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
2"	2.290	33#	29.0	2.5	25/50'	0.28	\$ 13.24
2½"	2.790	30#	29.0	3.0	25/50'	0.42	13.28
3"	3.320	27#	29.0	3.5	25/50'	0.53	15.26
4"	4.340	18#	28.0	4.5	25/50'	0.69	17.52
5"	5.340	16#	26.0	5.5	25/50'	0.81	20.28
6"	6.370	14#	23.5	6.3	25/50'	1.23	21.00
7"	7.400	12#	18.0	7.3	25/50'	1.47	25.90
8"	8.400	11#	13.5	8.8	25/50'	1.60	27.28

AVAILABLE IN STANDARD LENGTHS ONLY



(Series 1870)



Exhaust & Ventilation Hose

Extreme Hi-Temperature Exhaust Hose

Service: Designed for extracting exhaust fumes for automotive, general engine, iron and steel works, and as a heat shield or compensator. Temperature range: 200°F to 1500°F.

Construction: 3-Ply Non-flammable, lightweight and flexible ceramic coated hose reinforced with V4A stainless steel wire. External steel wearstrip for abrasion resistance.

I.D.	Ply	W/P @70°F		Bend Radius	Length	Weight	
		Vacuum	Price/Ft			Ft	Price/Ft
4"	3	4#	8.0	8.0	25'	1.50	\$ 184.00
5"	3	3#	6.0	10.0	25'	1.80	218.00
6"	3	2#	6.0	12.0	25'	2.20	262.50
8"	3	1#	5.0	16.0	25'	3.00	300.00
10"	3	1#	4.0	20.0	25'	3.50	371.50
12"	3	1#	3.0	24.0	25'	3.85	449.50



(Series 2570)

AVAILABLE IN STANDARD LENGTHS ONLY

Welding Exhaust Hose

Service: Ideal hose for welding fume control, steel cut off and grinder exhaust. Temperature range: -20°F to 300°F.

Construction: Tri-laminate fiberglass with aluminized polyester/polyamid, mechanically bonded to corrosion resistant helix.

I.D.	PLY	W/P @70°F		Bend Radius	Length	Weight	
		Vacuum	Price/Ft			Ft	Price/Ft
4"	2	4#	2.7	6.0	25'	1.15	\$ 9.32
5"	2	4#	2.4	7.5	25'	1.25	10.64
6"	2	3#	2.2	9.0	25'	1.34	13.32
8"	2	3#	1.8	12.0	25'	1.75	17.98



(Series 2575)

Interlocked Polypropylene Duct

Service: General ducting and blower hose for spot coolers, clean room venting, fume/dust removal. Interlock construction allows inside diameter (I.D.) to be changed by twisting hose. Stays in place after flexing. Temperature range: -13°F to 180°F.

Construction: Natural color interlocked polypropylene.

I.D.	O.D.	Bend Radius		Length	Weight	
		Length	Ft		Price/Ft	
2½"	2.800	6.0	20'	0.35	\$ 5.65	
3"	3.230	7.0	20'	0.36	6.54	
4"	4.200	11.0	20'	0.52	8.90	
5"	5.200	14.0	20'	0.76	11.20	
6"	6.160	15.0	20'	0.79	12.82	
8"	8.060	20.0	20'	1.07	16.54	
10"	10.210	27.0	20'	1.52	24.52	
12"	12.070	32.0	20'	1.68	29.64	



(Series 2542)

AVAILABLE IN STANDARD LENGTHS ONLY

Garage Exhaust Hose

Service: Garage exhaust hose is non-crushable for engine exhaust ventilation systems. Temperature range: up to 400°F.

Construction: Black convoluted high temperature compound with flared screw-together ends.

I.D.	Length	Weight	
		Each	Price/Ft
2"	11'	6.50	\$ 17.85
2½"	11'	7.00	18.38
3"	11'	9.40	22.00
3½"	11'	11.75	29.92
4"	11'	16.00	35.70



(Series 2312)

ASK ABOUT OUR GARAGE EXHAUST HOSE ACCESSORIES
AVAILABLE IN STANDARD LENGTHS ONLY



800-852-1855



www.abbottrubber.com

Exhaust & Ventilation Hose

Flexible Galvanized Exhaust Hose

Service: Unlined galvanized steel for high temperature exhaust systems, conduits, spouts, or casting.

Temperature range: 40°F to 600°F.

Construction: Interlocked galvanized, .012" strip also available in a variety of metal thicknesses. Packing available to customer requirements.

I.D.	O.D.	Bend Radius	Length	Weight Ft	Price/Ft
1½"	1.650	11.0	25'	0.48	\$ 3.40
2"	2.160	15.0	25'	0.66	4.68
2½"	2.660	18.5	25'	0.85	5.94
3"	3.160	22.0	25'	1.02	7.28
3½"	3.660	26.0	25'	1.18	8.72
4"	4.160	29.0	25'	1.35	9.98
4½"	4.660	33.0	25'	1.52	10.70
5"	5.170	37.0	25'	1.68	11.78
6"	6.170	44.0	25'	2.00	14.84



(Series 2420)

Flexible Stainless Steel Exhaust Hose

Service: Unlined stainless steel for high temperature exhaust systems, conduits, spouts, or casting.

Temperature range: 40°F to 1000°F.

Construction: Interlocked stainless steel, .012" strip also available in a variety of metal thicknesses. Packing available to customer requirements.

I.D.	O.D.	Bend Radius	Length	Weight Ft	Price/Ft
1½"	1.650	11.0	25'	0.48	\$ 10.85
2"	2.160	15.0	25'	0.66	14.20
2½"	2.660	18.5	25'	0.85	18.32
3"	3.160	22.0	25'	1.02	22.35
3½"	3.660	26.0	25'	1.18	25.64
4"	4.160	29.0	25'	1.35	28.92
4½"	4.660	33.0	25'	1.52	32.70
5"	5.170	37.0	25'	1.68	36.14
6"	6.170	44.0	25'	2.00	44.70



(Series 2410)

Rubber Duct Cleaning Hose

Service: Blower and duct blower such as duct cleaning, leaf and grass collection, straw blowing and cement dust.

Temperature range: -40°F to 150°F.

Construction: EPDM rubber, smooth bore, supported by a Yellow abrasion resistant polypropylene external helix. Corrugated cover.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
4"	4.570	9#	6.0	4.0	50'	0.79	\$ 11.00
5"	5.530	7#	5.0	5.0	50'	0.83	16.08
6"	6.570	6#	4.0	6.0	50'	1.26	16.70
8"	8.720	4#	4.0	8.0	50'	1.92	23.85
10"	10.830	4#	4.0	10.0	50'	2.38	29.12
12"	12.730	3#	3.0	12.0	25'	2.65	40.25



(Series 1868)

AVAILABLE IN STANDARD LENGTHS ONLY

Insulation Blower Hose

Service: Crush resistant, all plastic translucent hose for insulation blowing equipment.

Temperature range: -40°F to 140°F.

Construction: Clear polyethylene supported by a translucent plastic helix.

I.D.	W/P @70°F	Vacuum	Bend Radius	Length	Weight Ft	Price/Ft
1½"	16#	29.0	2.2	25/50'	0.18	\$ 4.24
2"	14#	29.0	3.5	25/50'	0.23	5.42
2½"	13#	14.0	4.0	25/50'	0.35	6.45
3"	12#	9.0	5.0	25/50'	0.42	7.50
4"	10#	4.0	6.3	25/50'	0.55	9.20



(Series 1828)

AVAILABLE IN STANDARD LENGTHS ONLY



Special Purpose Hose


Single-Line Welding Hose

Service: Single line hose for oxygen-acetylene service. Meets RMA CGA, Type S, Grade R. Grade T also available. Temperature range: -40°F to 200°F.

Construction: EPDM smooth tube, braided rayon cord reinforcement, ribbed EPDM cover. Red for acetylene. Green for oxygen.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
3/16"	2	.438	200#	800'	0.07	\$ 1.72
1/4"	2	.531	200#	800'	0.10	2.22
5/16"	2	.594	200#	750'	0.13	2.78
3/8"	2	.656	200#	700'	0.14	3.05
1/2"	2	.875	200#	500'	0.25	5.35

LESS 10% FULL REELS

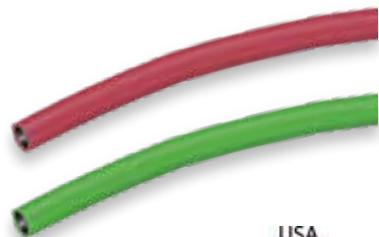

Red (Series 2060)
Green (Series 2061)

Twin Line Welding Hose

Service: Dual-line hose for oxygen-acetylene service. Meets RMA spec. Type VD, Grade R. Grade T also available. Temperature range: -20°F to 200°F.

Construction: One line Red EPDM and one line Green EPDM bonded together for easy handling.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
3/16"	2	.438	200#	800'	0.13	\$ 2.04
1/4"	2	.531	200#	800'	0.20	2.25
5/16"	2	.594	200#	750'	0.25	3.48
3/8"	2	.656	200#	700'	0.28	4.38

LESS 10% FULL REELS



(Series 2050)

Welding & Scarfing Hose

Service: Heavy duty welding and scarfing hose for rough applications. Meets RMA Grade T. Temperature range: -40°F to 200°F.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
3/8"	2	.812	250#	500'	0.27	\$ 5.24
1/2"	2	.937	250#	500'	0.33	5.34



Red (Series 2064)
Green (Series 2065)

AVAILABLE IN STANDARD LENGTHS ONLY

Oxygen Charging Hose

Service: Specially designed for steel mill lancing and scarfing. Temperature range: -30°F to 180°F.

I.D.	Ply	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
1/2"	2	1.020	500#	100'	0.45	\$ 11.70
3/4"	2	1.320	500#	100'	0.52	13.54
1"	2	1.540	500#	100'	0.59	13.84
1 1/4"	2	1.790	500#	100'	0.71	16.75
1 1/2"	4	2.140	500#	100'	0.98	18.75
2"	4	2.670	500#	100'	1.25	25.24



(Series 2068)

AVAILABLE IN STANDARD LENGTHS ONLY



800-852-1855



www.abbottrubber.com

Special Purpose Hose

Paint Spray/Chemical Hose

Service: Designed for use with paints, varnishes, solvents, kerosene and chemicals at high pressure. Temperature range: 0°F to 160°F.

Construction: Special nylon tube reinforced with braided polyester cord. Black Neoprene cover. Hose is compatible with popular paint spray fittings. Red cover available.

I.D.	Braid	O.D.	W/P		Reel	Weight	
			@70°F	Reel		Ft	Price/Ft
1/4"	1	.490	750#	500'	0.08	\$ 3.60	
3/8"	1	.700	750#	500'	0.15	3.92	
1/2"	1	.870	750#	500'	0.22	6.10	
3/4"	2	1.190	750#	500'	0.36	10.70	
1"	2	1.510	750#	500'	0.54	14.26	



Available Colors



(Series 2012)

LESS 10% FULL REELS

Airless Paint Spray Hose Assembly

Service: Lightweight and flexible static conductive hose for airless paint spray.

Temperature range: 0°F to 180°F.

Construction: Seamless nylon inner-core chemically bonded to multi-layers of high tensile synthetic reinforcement. Abrasion resistant polyurethane cover. Dissipates static charge.

I.D.	Braid	W/P		Price/ 25 Ft w/ Cplgs	Price/ 50 Ft w/ Cplgs
		@70°F	Reel		
1/4"	2	3300#	\$ 64.00	\$ 64.00	
3/8"	2	3300#	112.00		182.50



CONTACT US FOR NON-STANDARD LENGTHS
ASSEMBLY INCLUDES NPSH FEMALES AND SPRING GUARDS BOTH ENDS

(Series 2015)

LPG Butane/Propane Hose

Service: Flexible, heavy duty, high pressure hose for handling L.P. gas up to 50# working pressure. U.L. listed. Can also be used for low pressure natural gas. Not for use in confined work areas. Temperature range: -40°F to 180°F.

Construction: Smooth, permeation resistant Nitrile tube, braided synthetic reinforcement. Black oil resistant synthetic cover.

I.D.	Braid	O.D.	W/P		Reel	Weight	
			@70°F	Reel		Ft	Price/Ft
1/4"	2	.610	350#	700'	0.16	\$ 3.04	
3/8"	2	.760	350#	550'	0.22	3.08	
1/2"	2	.937	350#	450'	0.32	4.12	
3/4"	2	1.250	350#	300'	0.51	9.14	
1"	2	1.500	350#	250'	0.63	9.30	



(Series 2020)

LESS 10% FULL REELS

Service: Heavy duty plaster and grout, or cement discharge hose. Easy to handle and kink resistant.

Construction: Black abrasion resistant SBR rubber tube, spiral plies of high-strength polyester. Cover is abrasion resistant and ozone resistant rubber. Design Factor 2:1

I.D.	Ply	O.D.	W/P		Length	Weight	
			@70°F	Reel		Ft	Price/Ft
1"	2-Ply	1.670	1230#	50'	0.67	\$ 12.58	
1 1/4"	2-Ply	1.930	1230#	50'	0.80	13.40	
1 1/2"	4-Ply	2.310	1230#	50'	1.14	17.60	
2"	4-Ply	2.830	1230#	50'	1.46	19.80	
2 1/2"	4-Ply	3.343	1230#	50'	1.96	28.32	
3"	4-Ply	4.000	1230#	50'	2.39	38.50	
4"	4-Ply	5.158	1230#	50'	3.16	51.25	



(thru 2" ID)

AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1670)



Special Purpose Hose

Sand Blast Hose

Service: For conducting sand, steel shot or other sharp abrasives at high velocity. Use with industry standard sand blast couplings.

Construction: $\frac{1}{4}$ " thick abrasion resistant static-conducting tube. Reinforced with spiral polyester cord. Black abrasion resistant rubber cover.

Size	Ply	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
1/2"	2	1.130	150#	25/50/100'	0.38	\$ 4.38
3/4"	4	1.500	150#	25/50/100'	0.66	6.80
1"	4	1.875	150#	25/50/100'	0.80	7.68
1 1/4"	4	2.156	150#	25/50/100'	1.04	8.80
1 1/2"	4	2.375	150#	25/50/100'	1.25	10.46
2"	4	2.875	150#	25/50/100'	1.45	15.65



AVAILABLE IN 25, 50 OR 100 FT LENGTHS ONLY

(Series 1660)

Hot Tar & Asphalt Hose

Service: Designed to handle high temperature asphalt, tar, oil and other unrefined petroleum products. Maximum working temperature 350°F.

Construction: Special high temperature tube reinforced with a dual wire helix. Black petroleum, abrasion, heat and ozone resistant cover. Maximum length - 100 ft.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
1 1/2"	2.125	150#	29.0	6.0	0.98	\$ 28.12
2"	2.625	150#	29.0	8.0	1.43	34.58
3"	3.750	150#	29.0	12.0	2.42	46.62
4"	4.813	150#	29.0	18.0	3.60	58.32

I.D.	Ply	O.D.	W/P @70°F	Length	Price/Ft
1"	2-Wire	1.610	300#	0.84	\$ 22.50



(Series 1780)

Hot Air Blower Hose

Service: Used for hot air to 300°F under pressure between the air compressor and dry bulk tank.

Construction: Black EPDM, heat resistant tube, polyester cord and steel wire helix reinforcement. Black EPDM cover with orange stripe.

I.D.	O.D.	W/P @70°F	Vacuum	Bend Radius	Weight Ft	Price/Ft
2"	2.550	50#	29.0	5.0	1.22	\$ 17.40
3"	3.550	50#	29.0	7.0	1.93	28.40
4"	4.510	50#	29.0	10.0	2.65	40.78



(3 & 4" ID)
(Series 1740)

LESS 10% - FULL COILS OF 100 FT

Dry Materials/Cement Discharge Hose

Service: For pneumatic transfer of cement or dry powder under low pressure and for use with abrasive slurries.

Construction: Black abrasion resistant and static conducting natural rubber tube with polyester cord reinforcement. Black wear and weather resistant cover. Maximum length - 100 ft.

I.D.	Ply	O.D.	Tube	W/P @70°F	Weight Ft	Price/Ft
4"	2	4.530	3/16"	75#	1.58	\$ 20.40
4"	2	4.720	1/4"	75#	2.14	27.40
4 1/2"	2	5.240	1/4"	75#	2.30	38.62
5"	2	5.710	1/4"	75#	2.60	40.68



AVAILABLE IN 20 FT MULTIPLES ONLY

(Series 1750)



800-852-1855



www.abbottrubber.com

Special Purpose Hose

Petroleum Dock Hose - Built in Flanges

I.D.	W/P @70°F	Bend Radius	Length	Weight	
				Ea	Price/Ea
4"	250#	20.0	10'	136.00	\$ 1,800.50
4"	250#	20.0	20'	196.00	2,332.00
6"	250#	26.0	10'	257.00	3,002.50
6"	250#	26.0	20'	396.00	3,922.50
6"	250#	26.0	25'	485.00	4,619.00
6"	250#	26.0	30'	535.00	5,273.00
6"	250#	26.0	40'	638.00	6,629.00
6"	250#	26.0	50'	742.00	7,978.50
8"	250#	30.0	10'	397.00	4,415.50
8"	250#	30.0	20'	515.00	5,847.50
8"	250#	30.0	25'	605.00	6,910.00
8"	250#	30.0	30'	695.00	7,898.00
8"	250#	30.0	50'	1060.00	12,367.50
10"	250#	60.0	10'	781.00	7,295.00
10"	250#	60.0	20'	1037.00	9,043.50
10"	250#	60.0	25'	1165.00	11,624.00
12"	250#	100.0	10'	1006.00	8,959.00
12"	250#	100.0	20'	1427.00	11,973.50
12"	250#	100.0	25'	1749.00	14,219.00
14"	250#	175.0	10'	1258.00	12,413.50
14"	250#	175.0	20'	1547.00	17,132.00



(Series 1739)

Dredge Sleeve

Service: A rugged abrasion resistant hose used between pipes in dredging applications. Temperature range: -4°F to 180°F.

Construction: Abrasion resistant tube, reinforced with high tensile synthetic plies. Black weather and abrasion resistant SBR cover.

I.D.	Tube	O.D.	W/P @70°F	Weight		
				Length	Ft	Price/Ft
6 ⁵ / ₈ "	3/8"	8.000	125#	50'	8.20	\$ 95.50
8 ⁵ / ₈ "	3/8"	10.187	125#	50'	11.60	124.80
10 ³ / ₈ "	3/8"	12.312	125#	50'	14.60	166.50
12 ³ / ₈ "	3/8"	14.500	125#	50'	18.60	224.50



(Series 1128)

Softwall Marine Exhaust Hose

Service: Multiple ply soft wall hose used as a straight connection in wet exhaust systems or other industrial applications. Meets U.S.C.G type standards for specification SAE J2006 R1. Temperature range: -40°F to 200°F.

Construction: Oil, coolant and heat resistant Nitrile tube and an abrasion resistant cover reinforced with plies of synthetic fabric. Also available in hardwall construction.

I.D.	Ply	O.D.	W/P @70°F	Weight		
				Length	Ft	Price/Ft
2 ⁵ / ₈ "	2	2.937	200#	25'	1.25	\$ 28.24
2 ¹ / ₂ "	2	3.062	200#	25'	1.32	29.28
2 ⁷ / ₈ "	2	3.437	200#	25'	1.52	32.70
3"	4	3.625	200#	25'	1.46	34.98
3 ¹ / ₂ "	4	4.125	200#	25'	1.70	38.16
4"	4	4.625	200#	25'	1.93	38.90
4 ¹ / ₂ "	4	5.125	200#	25'	2.21	49.56
5"	4	5.937	200#	25'	3.80	62.54
5 ¹ / ₆ "	4	6.500	200#	25'	4.14	68.94
6"	4	6.938	200#	25'	4.51	88.92
6 ⁵ / ₈ "	4	7.563	200#	25'	5.01	101.74
8 ⁵ / ₈ "	6	9.500	150#	12 ¹ / ₂ '	5.95	173.68



LESS 15% FULL COILS

(Series 2269)



Automotive Hose

Radiator Hose

Service: Designed for use in engine cooling systems as a flexible connector. Temperature range: 0°F to 212°F.

Construction: Tube is heat and oil resistant. Cover is oil, heat, and ozone resistant. Wrapped fabric reinforcement. 5-ply also available.



(Series 2260)

I.D.	Ply	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
7/8"	2	1.250	56#	3/10'	0.41	\$ 16.74
1"	2	1.375	53#	3/10'	0.45	17.28
1 1/8"	2	1.500	53#	3/10'	0.50	18.02
1 1/4"	2	1.625	51#	3/10'	0.54	18.44
1 1/8"	2	1.750	51#	3/10'	0.58	19.24
1 1/2"	2	1.875	49#	3/10'	0.63	19.66
1 5/8"	2	2.000	49#	3/10'	0.67	20.64
1 3/4"	2	2.125	48#	3/10'	0.71	21.40
1 7/8"	2	2.250	45#	3/10'	0.76	21.94
2"	2	2.375	45#	3/10'	0.80	23.40
2 1/4"	2	2.625	43#	3/10'	0.89	25.65
2 3/8"	2	2.750	39#	3/10'	0.93	29.34
2 1/2"	2	2.875	39#	3/10'	0.99	31.42
2 3/4"	2	3.125	38#	3/10'	1.02	33.58
3 1/2"	2	3.875	28#	3/10'	1.33	44.42
4 1/2"	2	5.875	16#	3/10'	1.69	58.40

AVAILABLE IN STANDARD LENGTHS ONLY

Radiator Hose

Wire-Inserted

Service: Lightweight wire-inserted hose available in a wide range of applications. Temperature range: -20°F to 212°F.

Construction: Gasoline, oil and heat resistant tube and cover. Helical wire reinforcement and a double ply of synthetic fabric.



(Series 2270)

I.D.	Ply	O.D.	W/P @70°F	Bend Radius	Length	Weight Ft	Price/Ft
1"	2	1.375	53#	3.0	12/60'	0.61	\$ 19.92
1 1/4"	2	1.625	44#	3.0	12/60'	0.72	21.12
1 1/8"	2	1.750	44#	4.0	12/60'	0.79	23.28
1 1/2"	2	1.875	44#	4.0	12/60'	0.84	23.52
1 1/8"	2	2.000	41#	5.0	12/60'	0.90	24.70
1 1/4"	2	2.125	41#	5.0	12/60'	0.96	25.58
1 1/8"	2	2.250	38#	5.0	12/60'	1.02	26.34
2"	2	2.375	35#	6.0	12/60'	1.07	29.74
2 1/4"	2	2.625	34#	6.0	12/60'	1.18	32.22
2 3/8"	2	2.750	33#	7.0	12/60'	1.19	32.90
2 1/2"	2	2.875	30#	8.0	12/60'	1.23	43.96
2 3/4"	2	3.125	29#	10.0	12/60'	1.34	46.28
3"	2	3.375	26#	13.0	12/60'	1.51	50.40
3 1/2"	2	3.875	20#	14.0	12/60'	1.75	66.70
4 1/2"	2	4.875	16#	16.0	12/60'	2.21	76.78

STOCKED IN 12 FT LENGTHS ONLY

Silicone Radiator Hose

Service: Heavy duty coolant hose for use in trucks and buses where severe temperatures and operating conditions exist. Resistant to oil, anti-freeze, hardening, cracking, and weathering. Temperature range: -65°F to 350°F.



(Series 2290)

I.D.	Ply	O.D.	W/P @70°F	Length	Weight Ft	Price/Ft
7/8"	3	1.210	105#	3'	.040	\$ 18.86
1"	3	1.330	103#	3'	0.44	18.90
1 1/8"	3	1.460	93#	3'	0.48	20.70
1 1/4"	3	1.580	89#	3'	0.52	21.78
1 3/8"	3	1.710	82#	3'	0.56	23.22
1 1/2"	3	1.830	78#	3'	0.60	23.94
1 5/8"	3	1.950	76#	3'	0.64	26.14
1 3/4"	3	2.080	73#	3'	0.69	26.86
1 7/8"	3	2.210	70#	3'	0.74	29.78
2"	3	2.330	68#	3'	0.77	31.15
2 1/8"	3	2.460	67#	3'	0.81	32.68
2 1/4"	3	2.580	64#	3'	0.86	34.12
2 3/8"	3	2.710	63#	3'	0.90	35.55
2 1/2"	3	2.830	61#	3'	0.94	36.32
2 3/4"	3	3.080	58#	3'	1.02	39.20
3"	3	3.330	45#	3'	1.11	42.84
3 1/2"	3	3.830	38#	3'	1.33	53.02
4"	3	4.330	34#	3'	1.50	57.38

AVAILABLE IN STANDARD LENGTHS ONLY

Silicone Radiator Hose

Wire-Inserted

Service: Low pressure coolant and heat connections in hostile engine environments. Resists aging, ozone, chemicals, lubricants, hardening and cracking. Temperature range: -65°F to 350°F.



(Series 2295)

I.D.	Ply	O.D.	W/P @70°F	Bend Radius	Length	Weight Ft	Price/Ft
1"	2	1.330	175#	4.0	3/12'	0.30	\$ 37.14
1 1/4"	2	1.580	160#	5.0	3/12'	0.37	47.00
1 1/2"	2	1.832	160#	6.0	3/12'	0.43	46.34
1 1/4"	2	2.082	150#	7.0	3/12'	0.50	54.90
2"	2	2.332	140#	8.0	3/12'	0.56	57.50
2 1/4"	2	2.580	125#	9.0	3/12'	0.64	60.08
2 1/2"	2	2.850	100#	10.0	3/12'	0.71	63.45
2 3/4"	2	3.100	100#	11.0	3/12'	0.78	66.00
3"	2	3.350	100#	12.0	3/12'	0.83	78.80
3 1/2"	2	3.850	85#	14.0	3/12'	0.97	88.18
4"	2	4.350	75#	16.0	3/12'	1.11	92.70
4 1/2"	2	4.350	75#	16.0	3/12'	1.11	105.40
5"	2	5.350	40#	20.0	3/12'	1.38	118.12

AVAILABLE IN STANDARD LENGTHS ONLY



800-852-1855



www.abbottrubber.com

Automotive Hose

Heater Hose

Service: Designed for cooling system applications. Resistant to common coolant solutions. Meets SAE J20R3. Temperature range: -40°F to 257°F.

Construction: Black EPDM tube and cover, reinforced with spiral polyester.

I.D.	Braid	O.D.	W/P		Reel	Weight	
			@70°F	500'		Ft	Price/Ft
1/2"	1	.800	60#	500'	0.18	\$ 1.60	
5/8"	1	.880	60#	500'	0.22	1.70	
3/4"	1	1.030	50#	500'	0.25	1.90	
1"	1	1.340	45#	250'	0.38	2.58	

LESS 10% FULL REELS



Service: Premium construction coolant hose provides long service life in all automotive and truck cooling applications. Meets SAE J20R3 D3 HT. Temperature range: -40°F to 300°F.

Construction: High quality EPDM tube and EPDM Blue cover reinforced with Kevlar® yarn.

I.D.	Braid	O.D.	W/P		Reel	Weight	
			@70°F	500'		Ft	Price/Ft
5/8"	1	.909	60#	500'	0.21	\$ 3.95	
3/4"	1	1.035	50#	500'	0.24	4.80	
1"	1	1.291	45#	450'	0.36	5.04	

LESS 10% FULL REELS



Service: High temperature low pressure coolant hose to SAE J20R3 specifications. Resists aging, ozone, chemicals and cracking. Temperature range: -65°F to 350°F.

Construction: Silicone tube and cover with polyester reinforcement. Blue cover.

I.D.	Braid	O.D.	W/P		Length	Weight	
			@70°F	25/50/100'		Ft	Price/Ft
1/2"	1	.760	60#	25/50/100'	0.18	\$ 6.36	
5/8"	1	.930	60#	25/50/100'	0.22	6.92	
3/4"	1	1.070	50#	25/50/100'	0.25	8.10	
1"	1	1.240	45#	25/50/100'	0.38	11.88	
1 1/4"	1	1.380	40#	25/50/100'	0.52	23.50	

AVAILABLE IN STANDARD LENGTHS ONLY



Service: High quality abrasion and ozone resistant tubing for driveway signal bell.

Construction: Black EPDM, non-reinforced.

I.D.	O.D.	W/P		Length	Weight	
		@70°F	25#		Ft	Price/Ft
3/8"	.625	25#		500'	0.45	\$ 2.50

LESS 10% FULL REELS



Service: Designed to be used on windshield wiper systems, windshield washer fluid tanks, wet arm wiper tubing, and as vacuum tubing. SAE J1037 specifications.

Construction: Black EPDM, non-reinforced weather resistant rubber.

I.D.	O.D.	W/P		Length	Weight	
		@70°F	50#		Ft	Price/Ft
1/8"	.250	50#		100'	0.03	\$.58
5/32"	.344	50#		100'	0.05	.80

AVAILABLE IN STANDARD LENGTHS ONLY



Automotive Hose

SAE J30R7 Fuel Line Hose

Service: Fuel line, vapor emission, and crankcase ventilation hose to SAE J30R7 specifications. Temperature range: -40°F to 257°F.

Construction: Black Nitrile tube and Hypalon® cover with a single ply reinforcement of polyester. Also available in CARB and EPA constructions (SAE 30R14)

I.D.	Braid	O.D.	W/P		Reel	Weight	
			@70°F	Reel		Ft	Price/Ft
3/16"	1	.410	50#	250'	0.06	\$ 1.12	
1/4"	1	.500	50#	250'	0.09	1.30	
5/16"	1	.560	50#	250'	0.11	1.50	
3/8"	1	.630	50#	250'	0.12	1.68	
1/2"	1	.780	35#	250'	0.18	2.25	
5/8"	1	.940	35#	250'	0.24	3.20	
3/4"	1	1.125	35#	250'	0.42	4.70	

LESS 10% FULL REELS



(Series 2230)

SAE J30R9 Fuel Injection Hose

Service: Hose designed for auto and truck fuel injection systems hose to SAE J30R9 specifications. CARB approved (C-U-06-011) Temperature range: -29°F to 275°F.

Construction: Special Nitrile blend tube and Hypalon® cover with a single braid of Kevlar® reinforcement.

I.D.	Braid	O.D.	W/P		Reel	Weight	
			@70°F	Reel		Ft	Price/Ft
1/4"	1	.500	100#	250'	0.10	\$ 5.10	
5/16"	1	.560	100#	250'	0.12	5.18	
3/8"	1	.630	100#	250'	0.14	5.80	

AVAILABLE IN STANDARD LENGTHS ONLY



(Series 2239)

Transmission Oil Cooler Hose

Service: Designed for use in connecting add-on and external transmission oil coolers for auto and light trucks. Equal to SAE J1019. Temperature range: -40°F to 250°F.

Construction: Black Nitrile tube and Hypalon® cover with a single braid of synthetic reinforcement.

I.D.	Braid	O.D.	W/P		Reel	Weight	
			@70°F	Reel		Ft	Price/Ft
5/16"	1	.620	250#	500'	0.14	\$ 1.58	
11/32"	1	.655	250#	500'	0.15	1.60	
3/8"	1	.690	250#	500'	0.16	1.70	
1/2"	1	.870	250#	500'	0.25	2.65	

AVAILABLE IN STANDARD LENGTHS ONLY



(Series 2238)

SAE J189 Power Steering Return Hose

Service: Designed for use as on the return side of automotive and truck power steering systems. SAE J189 specifications. Temperature range: -40°F to 250°F.

Construction: Black Neoprene tube and Neoprene cover reinforced with a single braid of synthetic reinforcement.

I.D.	Braid	O.D.	W/P		Reel	Weight	
			@70°F	Reel		Ft	Price/Ft
3/8"	1	.660	250#	500'	0.13	\$ 2.80	

AVAILABLE IN STANDARD LENGTHS ONLY



(Series 2233)

SAE J1402A Air Brake Hose

Service: Designed for compressed air brake systems more commonly found on heavy duty trucks. SAE J1402A specifications and DOT (FMVSS-106) Temperature range: -40°F to 200°F.

Construction: Black EPDM tube and EPDM cover reinforced with a single braid of synthetic reinforcement.

I.D.	Braid	O.D.	W/P		Reel	Weight	
			@70°F	Reel		Ft	Price/Ft
3/8"	1	.660	250#	250'	0.17	\$ 1.70	
1/2"	1	.880	250#	250'	0.21	1.90	

AVAILABLE IN STANDARD LENGTHS ONLY



(Series 2232)



800-852-1855



www.abbottrubber.com

Rubber & Plastic Tubing

Neoprene Tubing

Service: Oil resistant tubing used for a multitude of applications. Temperature range: -20°F to 180°F.

Construction: Black 60 durometer commercial grade non-reinforced Neoprene.

Weight					
I.D.	Wall	O.D.	Coil	Ft	Price/Ft
1/8"	.062	.250	50'	0.03	\$ 2.14
3/16"	.062	.312	50'	0.04	2.82
1/4"	.062	.375	50'	0.05	2.80
1/4"	.125	.500	50'	0.07	4.32
5/16"	.062	.437	50'	0.06	2.92
3/8"	.062	.500	50'	0.10	2.92
3/8"	.125	.625	50'	0.17	2.58
1/2"	.125	.750	50'	0.20	5.58
5/8"	.125	.875	50'	0.22	6.10
3/4"	.125	1.000	50'	0.26	8.28
7/8"	.125	1.125	50'	0.28	11.52
1"	.125	1.250	50'	0.30	13.00



(Series 4010)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 15% FOR ORDERS OF 1,000 FT & OVER

Norprene® Elastomer Tubing

Service: High quality multi-purpose tubing. Excellent flexural fatigue characteristics. Can be used for peristaltic pump applications. Temperature range: -75°F to 275°F.

Construction: Black 61 durometer non-reinforced synthetic compound. Also available in White food grade.

Weight					
I.D.	Wall	O.D.	Coil	Ft	Price/Ft
1/8"	.062	.250	50'	0.03	\$ 1.15
3/16"	.062	.312	50'	0.04	1.26
1/4"	.062	.375	50'	0.05	1.40
1/4"	.125	.500	50'	0.07	3.40
5/16"	.062	.437	50'	0.06	1.80
3/8"	.062	.500	50'	0.10	1.86
3/8"	.125	.625	50'	0.17	4.48
1/2"	.125	.750	50'	0.20	5.62
5/8"	.125	.875	50'	0.22	6.75
3/4"	.125	1.000	50'	0.26	7.75
1"	.125	1.250	50'	0.30	10.02



(Series 4080)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

Viton® Tubing

Service: Exceptional chemical, oil and acid resistance and a wide temperature range. Temperature range: -40°F to 400°F.

Construction: Black, 100% pure Viton® rubber. 75 durometer. Also available in 60 durometer for peristaltic pump applications.

Weight					
I.D.	Wall	O.D.	Coil	Ft	Price/Ft
1/16"	.031	.125	50'	0.01	\$ 2.58
1/8"	.062	.250	50'	0.03	4.62
3/16"	.062	.312	50'	0.04	5.58
1/4"	.062	.375	50'	0.05	7.36
5/16"	.062	.437	50'	0.06	8.32
3/8"	.062	.500	50'	0.09	10.42
3/8"	.125	.625	50'	0.15	23.54
1/2"	.062	.625	50'	0.09	14.52
1/2"	.125	.750	50'	0.20	29.68



(Series 4170)


AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

Latex Tubing

Service: Extremely flexible and tear resistant tubing. Made from non-toxic ingredients to FDA standards. Temperature range: -30°F to 160°F.

Construction: Made from natural latex rubber. Soft 35 durometer. Amber color stocked, Black also available most sizes. Special colors available.

Weight					
I.D.	Wall	O.D.	Box	Ft	Price/Ft
1/8"	.062	.250	100'	0.02	\$.92
3/16"	.062	.312	100'	0.03	1.00
1/4"	.062	.375	100'	0.03	1.16
1/4"	.125	.500	100'	0.07	2.36
5/16"	.062	.437	100'	0.06	1.36
3/8"	.062	.500	100'	0.05	1.52
3/8"	.125	.625	50'	0.10	3.04
1/2"	.125	.750	50'	0.07	3.80
5/8"	.125	.875	50'	0.14	4.54
3/4"	.125	1.000	50'	0.17	5.72
1"	.125	1.250	50'	0.25	9.64

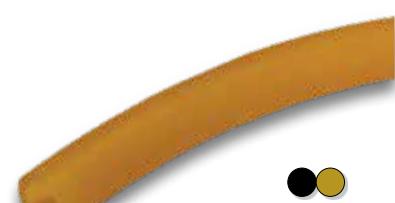

(Series 4030)

SOLD IN RANDOM LENGTH BOXES ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER



Rubber & Plastic Tubing

Pure Gum Tubing - Wrapped

Service: Flexible tubing used in laboratories and other industrial applications including air, vacuum, gaseous flow and for impact bumpers. Temperature range: -20°F to 180°F.

Construction: Tan 45 durometer natural rubber manufactured with machine wrapped fabric finish. Use heavy wall for vacuum applications. Available in Red or Black color some sizes.

I.D.	Wall	O.D.	Coil	Weight	
				Ft	Price/Ft
1/8"	.125	.375	100'	0.04	\$ 3.30
3/16"	.125	.437	50'	0.06	4.95
1/4"	.188	.625	25'	0.12	7.42
5/16"	.250	.812	25'	0.20	9.80
3/8"	.250	.875	25'	0.24	9.66
1/2"	.250	1.000	50'	0.26	12.60
5/8"	.250	1.125	25'	0.32	12.90
3/4"	.250	1.250	50'	0.34	11.90
1"	.250	1.500	50'	0.44	12.26
1 1/4"	.250	2.000	50'	0.52	15.64
1 1/2"	.250	2.500	10'	0.60	16.80
2"	.500	3.000	10'	1.80	45.50
3"	.500	4.000	10'	2.40	59.50

AVAILABLE IN STANDARD LENGTHS ONLY



(Series 4040)



Service: Very flexible high strength rubber tubing for many applications. Handles dilute acids and alkalies. Temperature range: -20°F to 180°F.

Construction: Tan 45 durometer natural rubber extruded with a smooth tube and cover.

I.D.	Wall	O.D.	Box	Weight	
				Ft	Price/Ft
1/8"	.062	.250	50'	0.02	\$ 2.10
3/16"	.062	.312	50'	0.02	3.15
1/4"	.125	.500	50'	0.08	4.90
3/8"	.125	.625	50'	0.10	5.46
1/2"	.125	.750	50'	0.12	5.88
5/8"	.125	.875	50'	0.14	8.40
3/4"	.125	1.000	50'	0.16	10.26

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER



(Series 4041)

Pure Gum Tubing - Extruded



Service: FDA grade silicone tubing for visual contact with flow. Odorless, tasteless and inert. NSF 51 compliant. Temperature range: -100°F to 450°F.

Construction: Extruded translucent natural 55 durometer silicone.

I.D.	Wall	O.D.	Box	Weight	
				Ft	Price/Ft
1/8"	.062	.250	100'	0.02	\$.85
3/16"	.062	.312	100'	0.03	.96
1/4"	.062	.375	100'	0.03	1.42
1/4"	.125	.500	100'	0.08	2.84
5/16"	.062	.437	100'	0.04	1.64
3/8"	.062	.500	100'	0.04	1.75
3/8"	.125	.625	100'	0.10	3.60
1/2"	.062	.625	100'	0.06	2.00
1/2"	.125	.750	100'	0.13	4.48

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER



(Series 4070)

Silicone Tubing



Service: FDA and chemical resistant tubing can be used with virtually all industrial solvents, chemicals and corrosive materials. Temperature range: -40°F to 170°F.

Construction: Clear flexible PVC covered FEP tube.

I.D.	Wall	O.D.	@70°F	Weight		
				Box	Ft	Price/Ft
1/8"	.062	.250	85#	100'	0.02	\$ 3.60
3/16"	.062	.312	75#	100'	0.03	4.78
1/4"	.062	.375	55#	100'	0.04	6.14
3/8"	.093	.437	50#	100'	0.05	8.70
1/2"	.125	.750	45#	100'	0.06	11.54

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER



(Series 3090)

FEP Lined PVC Tubing



800-852-1855



www.abbottrubber.com

Rubber & Plastic Tubing

LLDPE Polyethylene Tubing

Service: Lightweight and economical tubing for air lines, food and beverage processing, instrumentation and more. Manufactured to FDA standards. Temperature range: -30°F to 160°F.

Construction: 100% virgin grade linear low density polyethylene. Also available in Black color.

I.D.	Wall	O.D.	W/P		Weight	
			@70°F	Coil	Ft	Price/Ft
.170	.040	.250	100#	100/500'	0.01	\$.15
1/8"	.062	.250	100#	100/500'	0.02	.18
3/16"	.062	.312	100#	100/500'	0.02	.21
1/4"	.062	.375	100#	100/500'	0.03	.25
3/8"	.062	.500	75#	100/500'	0.04	.36
1/2"	.062	.625	62#	100'	0.05	.44
5/8"	.062	.750	50#	100'	0.06	.78
3/4"	.125	1.000	75#	100'	0.14	1.44



(Series 3050)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

Nylon Tubing

Service: Semi-rigid grade tubing for air, water, solvents, alkalies, oils, greases and petroleum products under pressure. Temperature range: -40°F to 225°F.

Construction: Natural Nylon 12 extruded to tightest tolerances. Also available in Black Color.

I.D.	Wall	O.D.	W/P		Weight	
			@70°F	Coil	Ft	Price/Ft
.091	.017	.125	250#	100/500'	0.01	\$.24
.106	.025	.156	250#	100/500'	0.01	.35
.138	.024	.187	250#	100/500'	0.01	.54
.180	.035	.250	250#	100/500'	0.01	.84
.232	.040	.312	250#	100/500'	0.02	1.20
.275	.050	.375	200#	100/500'	0.03	1.84
.376	.062	.500	200#	100/500'	0.04	2.92



(Series 3060)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

Hytrel® Air Brake Tubing

Service: Brake tubing for truck, bus and commercial air brake systems. Meets D.O.T. FMVSS 106 and SAE J844 Type B. Temperature range: -85°F to 200°F.

Construction: Special polyester elastomer tube and cover reinforced with polyester yarn. Available in colors Black, Blue, Green, Orange and Red.

I.D.	Wall	O.D.	W/P		Weight	
			@70°F	Reel	Ft	Price/Ft
.250	.060	3/8"	350#	100/500'	0.03	\$.98
.376	.060	1/2"	235#	100/500'	0.04	1.32
.441	.090	5/8"	225#	100/250'	0.08	2.42
.556	.090	3/4"	212#	100/250'	0.10	3.38



(Series 2236)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

PVDF Kynar® Tubing

Service: Translucent, semi-rigid co-polymer tubing for higher pH chemical applications. FDA and USP Class VI compatible. Temperature range: -25°F to 250°F.

Construction: Translucent White Kynar® extruded to tightest tolerances available.

I.D.	Wall	O.D.	W/P		Weight	
			@70°F	Coil	Ft	Price/Ft
.170	.040	.250	240#	50/100'	0.03	\$ 4.18
1/8"	.062	.250	375#	50/100'	0.04	4.52
3/16"	.062	.312	300#	50/100'	0.04	6.28
1/4"	.062	.375	240#	50/100'	0.06	7.92
5/16"	.062	.437	210#	50/100'	0.06	9.15
3/8"	.062	.500	180#	50/100'	0.07	10.86
1/2"	.062	.625	145#	50/100'	0.09	13.64
5/8"	.062	.750	120#	50/100'	0.11	17.36
3/4"	.062	.875	100#	50/100'	0.13	19.34



(Series 3380)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER



Rubber & Plastic Tubing

PFA Fluoropolymer Tubing

Service: Transparent, semi-rigid, and chemically inert tubing. Excellent electrical and weathering properties.

Temperature range:
-275°F to 500°F.

Construction: Manufactured using FDA sanctioned ingredients for use with food product. Higher working pressures than FEP tubing. Tubing is autoclavable.

I.D.	Wall	O.D.	W/P		Weight		Price/Ft
			@70°F	Coil	Ft		
1/16"	.031	.125	350#	50/100'	0.02	\$ 2.92	
1/8"	.031	.187	230#	50/100'	0.03	4.72	
5/32"	.046	.250	270#	50/100'	0.04	8.86	
1/4"	.062	.375	240#	50/100'	0.05	16.22	
3/8"	.062	.500	180#	50/100'	0.07	20.22	
1/2"	.062	.625	140#	50/100'	0.09	24.08	



(Series 3280)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

FEP Fluoropolymer Tubing

Service: Transparent, semi-rigid, and chemically inert tubing. Excellent electrical and weather properties.

Temperature range:
-400°F to 400°F.

Construction: Manufactured using FDA sanctioned ingredients for use with food product. Tubing is autoclavable.

I.D.	Wall	O.D.	W/P		Weight		Price/Ft
			@70°F	Coil	Ft		
1/16"	.031	.125	180#	50/100'	0.02	\$ 1.48	
1/8"	.031	.187	140#	50/100'	0.02	2.54	
3/16"	.031	.250	100#	50/100'	0.02	3.14	
1/4"	.031	.312	76#	50/100'	0.03	4.12	
5/16"	.031	.375	56#	50/100'	0.03	5.08	
3/8"	.031	.437	52#	50/100'	0.03	5.95	
7/16"	.031	.500	46#	50/100'	0.04	7.00	
1/2"	.031	.562	38#	50/100'	0.05	8.14	



(Series 3290)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER


Polyurethane Tubing

Service: Transparent, flexible, resilient, abrasion and impact resistant tubing. Very abrasion resistant.

Temperature range:
-95°F to 185°F.

Construction: Ester based polyurethane compound will handle oils, greases and fuels.

I.D.	Wall	O.D.	W/P		Weight		Price/Ft
			@70°F	Coil	Ft		
1/8"	.062	.250	130#	100'	0.02	\$.68	
3/16"	.062	.312	75#	100'	0.03	.74	
1/4"	.062	.375	65#	100'	0.04	.76	
1/4"	.125	.500	130#	100'	0.08	1.82	
5/16"	.062	.437	65#	100'	0.04	.88	
3/8"	.062	.500	60#	100'	0.05	1.02	
3/8"	.125	.625	100#	100'	0.10	2.40	
1/2"	.062	.625	35#	50/100'	0.06	1.34	
1/2"	.125	.750	60#	50/100'	0.13	2.85	
5/8"	.125	.875	60#	50/100'	0.15	3.24	
3/4"	.125	1.000	50#	50/100'	0.18	3.65	
1"	.125	1.250	40#	50/100'	0.23	6.00	

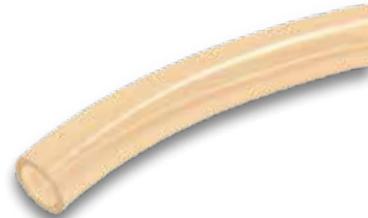

(Series 3070)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

Braided Polyurethane Tubing

Service: Transparent, flexible, resilient, abrasion and impact resistant tubing with an open mesh braid within the wall for pressure applications. NSF 61 listed. Temperature range:
-90°F to 175°F.

Construction: Ether based polyurethane compound will handle oils, greases, fuels and water based materials.

I.D.	Wall	O.D.	W/P		Weight		Price/Ft
			@70°F	Coil	Ft		
1/4"	.110	.470	250#	100'	0.04	\$ 2.16	
3/8"	.128	.630	200#	100'	0.10	3.48	
1/2"	.125	.750	150#	100'	0.13	4.22	
5/8"	.140	.905	125#	100'	0.15	6.72	
3/4"	.138	1.025	100#	100'	0.18	6.98	
1"	.150	1.300	75#	100'	0.25	9.56	



(Series 3075)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER



800-852-1855



www.abbottrubber.com

Rubber & Plastic Tubing


Clear PVC Braided Tubing

Service: A lightweight, non-marking, flexible standard wall clear reinforced tubing for a wide variety of applications including food, beverage, air and liquids. In compliance with FDA and NSF-51.

Temperature range: 25°F to 150°F.

Construction: Clear reinforced PVC with blue tint reinforced with spiral polyester. Also available in metric sizes.

I.D.	O.D.	W/P @70°F	Coil	Weight Ft	Price/Ft
1/8"	.325	250#	300'	0.03	\$.56
3/16"	.375	250#	300'	0.04	.66
1/4"	.437	250#	300'	0.06	.68
5/16"	.531	250#	300'	0.08	.84
3/8"	.593	225#	300'	0.09	.86
1/2"	.750	200#	300'	0.13	1.28
5/8"	.875	200#	300'	0.18	1.55
3/4"	1.031	150#	300'	0.22	1.88
1"	1.312	125#	300'	0.30	2.60
1 1/4"	1.687	100#	100'	0.45	4.58
1 1/2"	1.937	100#	100'	0.64	5.70
2"	2.500	75#	100'	0.94	8.26

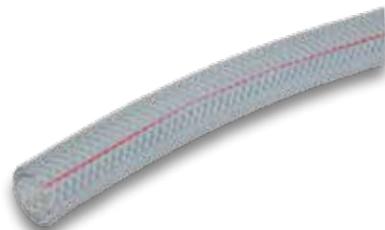

(Series 3020)

LESS 15% FULL COILS

LESS 5% FOR ORDERS OF 1,000 FT & OVER

Heavy Wall Clear PVC Braided Tubing

Service: A high pressure, non-marking, flexible heavy wall clear reinforced tubing for a wide variety of applications including food, beverage, air and liquids. In compliance with FDA, NSF-51 and USDA 3A.

Temperature range: 25°F to 150°F.

Construction: Heavy wall clear reinforced PVC with blue tint reinforced with spiral polyester.

I.D.	O.D.	W/P @70°F	Coil	Weight Ft	Price/Ft
1/8"	.328	350#	300'	0.04	\$.82
3/16"	.406	350#	300'	0.06	.88
1/4"	.500	350#	300'	0.08	1.10
5/16"	.563	275#	300'	0.09	1.40
3/8"	.625	275#	300'	0.11	1.54
1/2"	.813	250#	300'	0.17	2.36
5/8"	1.000	225#	200'	0.26	3.82
3/4"	1.125	200#	200'	0.30	4.34
1"	1.375	150#	200'	0.38	5.44
1 1/4"	1.750	125#	100'	0.64	9.28
1 1/2"	2.000	100#	100'	0.96	10.70



(Series 3030)

LESS 15% FULL COILS

LESS 5% FOR ORDERS OF 1,000 FT & OVER

Clear PVC Vacuum Tubing Wire-Inserted

Service: Clear wire-reinforced construction handles pressure and full vacuum. Used to transport various chemicals and other liquids in areas with tight turns and sharp bends. FDA, NSF-51 and USDA 3A compliant. Temperature range: 25°F to 150°F.

Construction: Clear PVC with a spring steel wire within the wall. Convoluted outer cover.



(Series 3045)

I.D.	O.D.	W/P @70°F	Bend Radius	Length	Weight Ft	Price/Ft
1/4"	.460	150#	1.0	100'	0.07	\$ 1.05
3/8"	.600	100#	1.5	100'	0.11	1.64
1/2"	.750	100#	2.0	100'	0.15	2.16
5/8"	.891	100#	2.5	100'	0.19	2.56
3/4"	1.031	70#	3.0	100'	0.24	3.50
1"	1.297	70#	4.0	100'	0.33	4.50
1 1/4"	1.609	70#	5.0	25/50'	0.50	6.85
1 1/2"	1.860	50#	6.0	25/50'	0.58	7.96
2"	2.391	50#	8.0	25/50'	0.84	11.52
2 1/4"	2.750	50#	9.0	25/50'	1.16	18.80
2 1/2"	3.000	50#	10.0	25/50'	1.28	22.98
3"	3.500	50#	12.0	25/50'	1.62	26.62

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

Heavy Wall Vacuum Tubing Wire-Inserted

Service: Clear wire-reinforced construction handles higher pressure and full vacuum. Used to transport various chemicals and other liquids in areas with tight turns and sharp bends. FDA, NSF-51 and USDA 3A compliant. Temperature range: 25°F to 150°F.

Construction: Clear PVC with a spring steel wire within the wall. Smooth outer cover.



(Series 3040)

I.D.	O.D.	W/P @70°F	Bend Radius	Length	Weight Ft	Price/Ft
1/4"	.500	250#	1.0	100'	0.10	\$ 1.52
3/8"	.625	150#	1.5	100'	0.13	2.12
1/2"	.813	150#	2.0	100'	0.21	3.34
5/8"	1.000	150#	2.5	100'	0.30	5.25
3/4"	1.125	150#	3.0	100'	0.36	6.02
1"	1.375	100#	4.0	100'	0.44	7.52
1 1/4"	1.750	100#	5.0	25/50'	0.74	12.82
1 1/2"	2.000	100#	6.8	25/50'	0.84	15.16
2"	2.500	100#	8.0	25/50'	1.12	21.16

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER



Rubber & Plastic Tubing

Clear PVC Tubing

I.D.	Wall	O.D.	W/P @70°F	Weight		
				Coil	Ft	Price/Ft
1/16"	.031	.125	65#	100'	0.01	\$.10
1/8"	.062	.250	65#	100'	0.02	.16
3/16"	.062	.312	55#	100'	0.03	.19
1/4"	.062	.375	50#	100'	0.04	.26
1/4"	.093	.437	60#	100'	0.06	.36
1/4"	.125	.500	70#	100'	0.08	.45
5/16"	.062	.437	40#	100'	0.04	.30
5/16"	.093	.500	50#	100'	0.07	.43
3/8"	.062	.500	35#	100'	0.05	.31
3/8"	.093	.562	50#	100'	0.07	.47
3/8"	.125	.625	60#	100'	0.10	.70
7/16"	.062	.562	40#	100'	0.05	.37
1/2"	.062	.625	30#	100'	0.06	.42
1/2"	.093	.687	40#	100'	0.11	.59
1/2"	.125	.750	45#	100'	0.13	.83
5/8"	.125	.875	40#	100'	0.16	1.05
3/4"	.125	1.000	35#	100'	0.18	1.10
7/8"	.125	1.125	30#	100'	0.21	1.26
1"	.125	1.250	25#	100'	0.23	1.50
1 1/4"	.125	1.500	25#	50'	0.29	1.98
1 1/4"	.187	1.625	35#	50'	0.46	3.20
1 1/2"	.187	1.875	30#	50'	0.35	3.54
1 1/2"	.250	2.000	35#	50'	0.74	5.62
2"	.250	2.500	30#	50'	0.96	6.40



(Series 3010)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

Laboratory Grade PVC Tubing

I.D.	Wall	O.D.	W/P @70°F	Weight		
				Coil	Ft	Price/Ft
1/8"	.062	.250	50#	100'	0.02	\$.40
3/16"	.062	.312	35#	100'	0.03	.46
1/4"	.062	.375	30#	100'	0.04	.50
3/8"	.062	.500	22#	100'	0.05	.68
3/8"	.125	.625	40#	100'	0.10	1.52
1/2"	.062	.625	20#	100'	0.06	1.05
1/2"	.125	.750	30#	100'	0.11	2.00
5/8"	.125	.875	26#	100'	0.16	2.32
3/4"	.125	1.000	22#	50'	0.18	2.68
1"	.125	1.250	18#	50'	0.23	3.48



(Series 3180)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

Polypropylene Tubing

I.D.	Wall	O.D.	W/P @70°F	Weight		
				Coil	Ft	Price/Ft
.170	.040	.250	149#	100'	0.01	\$.22
1/8"	.062	.250	272#	100'	0.02	.30
3/16"	.062	.312	196#	100'	0.02	.32
1/4"	.062	.375	157#	100'	0.02	.40
3/8"	.062	.500	112#	100'	0.03	.58
1/2"	.062	.625	87#	100'	0.04	.75
5/8"	.062	.750	71#	100'	0.05	.90
3/4"	.125	1.000	110#	100'	0.14	2.36
1"	.125	1.250	87#	100'	0.18	3.04



(Series 3080)

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER



800-852-1855



www.abbottrubber.com

Flexible Metal Hose

Stainless Steel Flexible Metal Hose

Service: High temperature hose for air, water, steam and other applications including chemical and petroleum. Temperature range: -100°F to 850°F.

Construction: Annular close pitch Type 321 stainless steel hose with a single layer of Type 304 stainless steel braid.

I.D.	O.D.	W/P @70°F	Bend Radius	Weight Ft	Price/Ft
1/2"	.810	1050#	6.0	0.26	On Application
3/4"	1.100	760#	8.0	0.43	On Application
1"	1.420	525#	9.0	0.62	On Application
1 1/4"	1.720	490#	10.0	0.80	On Application
1 1/2"	1.950	450#	12.0	0.82	On Application
2"	2.580	400#	15.0	1.38	On Application
2 1/2"	3.450	285#	20.0	2.09	On Application
3"	4.010	260#	22.0	2.39	On Application
4"	5.030	230#	27.0	3.14	On Application



(Series 2710)

SUPPLIED AS WELDED ASSEMBLIES ONLY - COMPLETE COUPLING SERVICE AVAILABLE

Stainless Steel Flexible Connectors

Service: High temperature hose for air, water, steam and other applications including chemical and petroleum. Assemblies for connections, vibration and offset. Temperature range: -100°F to 850°F.

Construction: Annular close pitch Type 321 stainless steel hose, Type 304 stainless steel braid. Carbon steel welded on solid males or ASA 150# plate flanges.

I.D.	Overall Length	W/P @70°F	Weight	Price/Ea Male x Male	Price/Ea Flange x Flange
1/2"	10"	1050#	0.67	\$ 41.50	\$ ----
3/4"	10"	760#	0.98	44.00	----
1"	10"	525#	1.16	52.00	----
1 1/4"	10"	490#	1.72	58.25	----
1 1/2"	12"	450#	2.07	65.50	----
2"	14"	400#	3.44	82.25	----
2"	9"	400#	11.00	----	92.50
2 1/2"	9"	285#	14.00	----	151.00
3"	9"	260#	15.00	----	151.50
4"	9"	230#	22.00	----	201.50
5"	11"	190#	29.00	----	288.75
6"	11"	130#	36.00	----	364.75
8"	12"	125#	60.00	----	524.75



(Series 2712)

CONTACT US FOR NON-STANDARD LENGTHS

Metallic Expansion Joints

Service: Expansion Joint that combines the properties of metal and PTFE for absorbing pipe movement and vibration while reducing system noise and protecting against surge forces. Temperature range -300°F to 400°F.

Construction: PTFE leak proof tube formed into a Stainless Steel corrugated tube extending flange to flange. Woven polyester reinforced between the PTFE tube and the cover. Steel reinforcement provides additional strength for pressure and vacuum service. Floating type 150#, 300# or metric drilled flanges.

Made-to-Order. Available in construction of 4 to 12 convolutions. Special options available.

I.D.	Length (4 Convolutions)	W/P @70°F	Price/ Ea
1-1/2"	4.0"	50/150/300#	On Application
2"	4.0"	50/150/300#	On Application
3"	4.8"	50/150/300#	On Application
4"	5.1"	50/150/300#	On Application
6"	5.8"	50/150/300#	On Application
8"	6.5"	50/150/300#	On Application
10"	7.0"	50/150/300#	On Application
12"	7.8"	50/150/300#	On Application



(Series 2718)

SUPPLIED AS WELDED ASSEMBLIES ONLY - COMPLETE FABRICATION SERVICE AVAILABLE



Hydraulic Hose

SAE 100R1AT/1SN One Wire-Braid Hose

Service: Recommended for medium pressure hydraulic oil lines. Meets or exceeds requirements of SAE 100R1 Type AT EN 853 1SN. MSHA approved. Temperature range: -40°F to 212°F.

Construction: Black Nitrile, oil resistant tube and Neoprene cover with one braid of high tensile steel wire reinforcement.

I.D.	Braid	O.D.	W/P @70°F	Weight		Price/Ft
				Reel	Ft	
3/16"	1-Wire	.470	3630#	250'	0.12	\$ 2.72
1/4"	1-Wire	.530	3270#	250'	0.15	2.90
5/16"	1-Wire	.600	3120#	250'	0.17	2.98
3/8"	1-Wire	.690	2615#	250'	0.22	3.00
1/2"	1-Wire	.810	2320#	250'	0.28	3.56
3/4"	1-Wire	1.100	1530#	250'	0.41	5.55
1"	1-Wire	1.410	1280#	250'	0.62	7.32



(Series 1940)

LESS 10% FULL REELS

SAE 100R2AT/2SN Two Wire-Braid Hose

Service: Recommended for high pressure hydraulic oil lines. Meets or exceeds requirements of SAE 100R2 Type AT EN 8853 2SN. MSHA approved. Temperature range: -40°F to 212°F.

Construction: Black Nitrile, oil resistant tube and Neoprene cover with two braids of high tensile steel wire reinforcement.

I.D.	Braid	O.D.	W/P @70°F	Weight		Price/Ft
				Reel	Ft	
1/4"	2-Wire	.590	5800#	250'	0.27	\$ 4.58
3/8"	2-Wire	.750	4800#	250'	0.38	4.84
1/2"	2-Wire	.880	4000#	250'	0.46	5.32
5/8"	2-Wire	1.000	3630#	250'	0.55	8.46
3/4"	2-Wire	1.160	3120#	250'	0.65	9.88
1"	2-Wire	1.500	2400#	250'	0.98	13.98
1 1/4"	2-Wire	1.880	1820#	100'	1.30	23.20
1 1/2"	2-Wire	2.110	1310#	100'	1.60	27.92
2"	2-Wire	2.620	1160#	100'	1.98	31.74



(Series 1950)

LESS 10% FULL REELS

SAE 100R16 Two Wire-Braid Hose

Service: Recommended for high pressure hydraulic oil lines where extra flexibility is required. Meets or exceeds requirements of SAE 100R16 EN 857 2 SC MSHA approved. Temperature range: -40°F to 212°F.

Construction: Black Nitrile, oil resistant tube and Neoprene cover with two braids of high tensile steel wire reinforcement.

I.D.	Braid	O.D.	W/P @70°F	Weight		Price/Ft
				Reel	Ft	
1/4"	2-Wire	.540	5800#	250'	0.18	\$ 3.94
3/8"	2-Wire	.700	5000#	250'	0.27	4.70
1/2"	2-Wire	.810	5000#	250'	0.36	5.20
5/8"	2-Wire	.950	4000#	250'	0.41	7.05
3/4"	2-Wire	1.100	3500#	250'	0.55	10.46
1"	2-Wire	1.400	3000#	250'	0.83	13.34
1 1/4"	2-Wire	1.740	2250#	100'	1.11	22.86



(Series 1960)

LESS 10% FULL REELS

SAE 100R17 Wire-Braid Hose

Service: High pressure hydraulic applications where high pressures and a more flexible hose are required. Meets or exceeds requirements of SAE 100R17 MSHA approved. Temperature range: -40°F to 212°F.

Construction: Black Nitrile, oil resistant tube and Neoprene cover with braided high tensile steel wire reinforcement.

I.D.	Braid	O.D.	W/P @70°F	Weight		Price/Ft
				Reel	Ft	
1/4"	1-Wire	.500	3000#	500'	0.11	\$ 2.10
3/8"	1-Wire	.650	3000#	500'	0.17	2.82
1/2"	1-Wire	.780	3000#	350'	0.28	3.86
3/4"	2-Wire	1.130	3000#	400'	0.55	7.62
1"	2-Wire	1.440	3000#	200'	0.82	12.60



(Series 1954)

AVAILABLE IN STANDARD LENGTHS ONLY



800-852-1855



www.abbottrubber.com

Hydraulic Hose

SAE 100R12 4-Spiral Hose

Service: Very high pressure hydraulic hose for applications subject to surges and flexing. Meets or exceeds requirements of SAE 100R12. MSHA approved. Temperature range: -40°F to 250°F.

Construction: Black Neoprene tube with 4 alternating layers of spiraled high tensile steel wire. Gray synthetic rubber cover.

I.D.	Braid	O.D.	W/P @70°F	Coil	Weight Ft	Price/Ft
3/8"	4-Spiral	.800	4000#	150'	0.44	\$ 10.34
1/2"	4-Spiral	.940	4000#	150'	0.54	11.42
3/4"	4-Spiral	1.210	4000#	150'	0.85	16.04
1"	4-Spiral	1.500	4000#	150'	1.20	19.62
1 1/4"	4-Spiral	1.850	3000#	130'	1.84	27.24
1 1/2"	4-Spiral	2.100	2500#	130'	2.10	33.64
2"	4-Spiral	2.630	2500#	130'	2.71	47.62



LESS 10% FULL COILS

(Series 1992)

SAE 100R13 4-Spiral Hose

Service: Extreme high pressure hydraulic hose for applications subject to surges and flexing. Meets or exceeds requirements of SAE 100R13. MSHA approved. Temperature range: -40°F to 250°F.

Construction: Black Neoprene tube and cover. 4 alternating layers of spiraled high tensile steel wire.

I.D.	Braid	O.D.	W/P @70°F	Coil	Weight Ft	Price/Ft
3/4"	4-Spiral	1.280	5000#	130'	1.04	\$ 13.30
1"	4-Spiral	1.510	5000#	130'	1.34	19.96
1 1/4"	4-Spiral	1.960	5000#	100'	2.40	35.12
1 1/2"	4-Spiral	2.260	5000#	100'	3.35	45.05
2"	4-Spiral	2.800	5000#	100'	4.38	53.16



LESS 10% FULL COILS
AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1994)

SAE 100R6 1-Braid Hose

Service: Low pressure, textile reinforced for use with petroleum and water based fluids. Meets or exceeds requirements of SAE 100R6. Temperature range: -40°F to 212°F.

Construction: Black Nitrile tube and Black Neoprene cover reinforced with one layer of textile braid.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
1/4"	1	.510	400#	50/500'	0.09	4.84
5/16"	1	.570	400#	50/500'	0.09	5.06
3/8"	1	.640	400#	50/500'	0.11	5.64
1/2"	1	.770	400#	50/500'	0.16	7.78
5/8"	1	.910	350#	50/500'	0.18	15.64
3/4"	1	1.060	300#	50/500'	0.25	17.20



AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1935)

SAE 100R3 2-Braid Hose

Service: Low pressure, double braided for use with petroleum and water based fluids. Meets or exceeds requirements of SAE 100R3. MSHA approved. Temperature range: -40°F to 212°F.

Construction: Black Nitrile tube and Black Neoprene cover reinforced with two layers of textile braid.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
1/4"	2	.560	1250#	50/500'	0.12	\$ 5.14
3/8"	2	.750	1125#	50/500'	0.17	5.92
1/2"	2	.940	1000#	50/500'	0.25	7.60
3/4"	2	1.250	750#	50/500'	0.43	10.40
1"	2	1.500	565#	50/450'	0.51	12.52



AVAILABLE IN STANDARD LENGTHS ONLY

(Series 1930)



Hydraulic Hose

Thermoplastic SAE 100R7 Hose

Service: Medium pressure thermoplastic hydraulic hose for petroleum, water and synthetic based fluids. Meets or exceeds requirements of SAE 100R7.

Temperature range:
-40°F to 200°F.

Construction: Nylon tube reinforced 1 braid of synthetic yarn. Black abrasion resistant Urethane cover. Also available in twin-line construction.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
3/16"	1	.430	3000#	250'	0.05	\$ 1.98
1/4"	1	.510	2750#	250'	0.06	2.00
5/16"	1	.590	2500#	250'	0.07	2.32
3/8"	1	.670	2250#	250'	0.10	2.95
1/2"	1	.820	2000#	250'	0.14	4.65
3/4"	1	1.020	1250#	200'	0.19	6.42

LESS 10% FULL COILS



(Series 1970)

Non-Conductive Thermoplastic SAE 100R7 Hose

Service: Medium pressure non-conductive thermoplastic hydraulic hose for petroleum, water and synthetic based fluids. Meets or exceeds requirements of SAE 100R7.

Temperature range:
-40°F to 200°F.

Construction: Nylon tube reinforced with 1 braid of synthetic yarn. Non-conductive Orange abrasion resistant Urethane cover.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
3/16"	1	.430	3000#	250'	0.05	\$ 2.28
1/4"	1	.510	2750#	250'	0.06	2.48
5/16"	1	.590	2500#	250'	0.07	3.05
3/8"	1	.670	2250#	250'	0.10	3.28
1/2"	1	.820	2000#	250'	0.14	4.18
3/4"	1	1.070	1250#	200'	0.19	7.62

LESS 10% FULL COILS



(Series 1971)

Thermoplastic SAE 100R8 Hose

Service: High pressure thermoplastic hydraulic hose for petroleum, water and synthetic based fluids. Meets or exceeds requirements of SAE 100R8.

Temperature range:
-40°F to 200°F.

Construction: Nylon tube reinforced with 2 braids of synthetic yarn. Abrasion resistant Black Urethane cover.

I.D.	Braid	O.D.	W/P @70°F	Reel	Weight Ft	Price/Ft
3/16"	2	.520	5000#	250'	0.08	\$ 4.40
1/4"	2	.630	5000#	250'	0.12	4.78
3/8"	2	.770	4000#	250'	0.15	6.18
1/2"	2	.890	3500#	250'	0.19	8.32

LESS 10% FULL COILS



(Series 1974)

SAE 100R4 Suction Hose

Service: Low pressure or return line for petroleum and water based hydraulic fluids. Meets or exceeds requirements of SAE 100R4. MSHA approved.

Temperature range:
-40°F to 240°F.

Construction: Black Nitrile tube with spiral plied synthetic fabric and a wire helix. Black Neoprene cover.

I.D.	Braid	O.D.	W/P @70°F	Coil	Weight Ft	Price/Ft
3/4"	2	1.16	350#	100'	0.53	\$ 11.54
1"	2	1.46	325#	100'	0.65	11.84
1 1/4"	2	1.72	250#	100'	0.80	12.32
1 1/2"	2	1.96	205#	100'	0.91	14.56
2"	2	2.46	225#	100'	1.18	18.10

LESS 10% FULL COILS



(Series 1920)



800-852-1855



www.abbottrubber.com

Rubber Expansion Joints

Flanged Single Arch Expansion Joint

Size	Length	W/P @70°F	Maximum Vacuum	Weight Ea	Price/Ea
1 1/4"	6"	225#	16.0	5.00	\$ 67.00
1 1/2"	6"	225#	16.0	6.10	77.25
2"	6"	225#	16.0	8.90	93.75
2 1/2"	6"	225#	16.0	12.30	117.75
3"	6"	225#	16.0	14.00	140.00
4"	6"	225#	16.0	18.30	183.00
5"	6"	225#	16.0	22.80	185.50
6"	6"	225#	16.0	26.80	280.00
8"	6"	225#	16.0	40.60	404.00
10"	8"	225#	16.0	56.60	612.50
12"	8"	225#	16.0	83.00	779.50
14"	8"	140#	16.0	115.00	1,033.00
16"	8"	140#	16.0	165.00	1,325.00
18"	8"	125#	16.0	168.00	1,602.00
20"	8"	125#	16.0	170.00	1,823.50

Service: Used as a connector between pipes. Excellent vibration and sound absorption. Construction allows four-way movement. Temperature range: -40°F to 220°F.

Construction: Oil resistant Neoprene, reinforced with nylon fabric and a spring steel wire. Single arch design supplied with forged carbon steel flanges.



CONTACT US FOR OTHER TUBE AND COVER COMPOUNDS

(Series 2810)

Flanged Double Arch Expansion Joint

Size	Length	W/P @70°F	Maximum Vacuum	Weight Ea	Price/Ea
1 1/4"	7"	150#	16.0	5.03	\$ 96.75
1 1/2"	7"	150#	16.0	6.80	97.00
2"	7"	150#	16.0	9.00	102.50
2 1/2"	7"	150#	16.0	13.30	106.50
3"	7"	150#	16.0	14.30	190.75
4"	9"	150#	16.0	20.30	238.50
5"	9"	150#	16.0	24.50	242.00
6"	9"	150#	16.0	29.50	388.50
8"	13"	150#	16.0	43.80	840.00
10"	13"	150#	16.0	64.10	879.75
12"	13"	150#	16.0	95.00	1,012.50

Service: Used as a connector between pipes. Excellent vibration and sound absorption. Construction allows four-way movement. Temperature range: -40°F to 220°F.

Construction: Oil resistant Neoprene, reinforced with nylon fabric and a spring steel wire. Double arch design supplied with forged carbon steel flanges.



CONTACT US FOR OTHER TUBE AND COVER COMPOUNDS

(Series 2820)

Threaded Double Arch Expansion Joint

Size	Length	W/P @70°F	Maximum Vacuum	Weight Ea	Price/Ea
3/4"	8"	150#	16.0	1.80	\$ 33.00
1"	8"	150#	16.0	2.80	52.50
1 1/4"	8"	150#	16.0	3.50	59.00
1 1/2"	8"	150#	16.0	4.00	74.75
2"	8"	150#	16.0	5.00	95.50

Service: Threaded union rubber expansion joint for vibration and expansion or contraction between pipes in a variety of industries. Temperature range: -40°F to 220°F.

Construction: Oil resistant Neoprene, reinforced with nylon fabric. Cast ductile iron pipe unions.



CONTACT US FOR OTHER TUBE AND COVER COMPOUNDS

(Series 2830)

Technical Data

Hose Design Factors

Unless otherwise stated in this catalog, all Abbott Rubber hose specifications meet or exceed the following industry minimum hose design factors for newly manufactured hose:

- Water Hose up to 150 psi WP - **3:1**
- Hoses for all other liquids, solid materials suspended in liquids or air, and water hose over 150 psi WP - **4:1**
- Hoses for compressed air and other gasses - **4:1**
- Hoses for liquid media that immediately changes into gas under standard atmospheric conditions - **5:1**
- Steam Hose - **10:1**
- Other industry design ratios exist - contact us for specifications detail.

Temperature De-Rating Chart

De-rating factor applies to hose system pressure ratings

Hose Type	70°	90°	150°	200°	250°	300°	350°	400°	450°	500°
Steam	1.00	0.95	0.81	0.68	0.56	0.44	0.32	0.20	0.08	N/R
Hot Tar & Asphalt	1.00	0.95	0.81	0.68	0.56	0.44	0.32	0.20	0.08	N/R
PVC	1.00	0.82	0.30	N/R						
Rubber	1.00	0.91	0.64	0.42	0.20	N/R	N/R	N/R	N/R	N/R
Chemical	1.00	0.91	0.64	0.42	0.20	N/R	N/R	N/R	N/R	N/R
Air	1.00	0.91	0.64	0.42	0.20	N/R	N/R	N/R	N/R	N/R
Soft	1.00	0.91	0.64	0.42	0.20	N/R	N/R	N/R	N/R	N/R

Oil Resistance Chart

The definition of Oil Resistance is currently related to Tensile Retention % and Volume Swell % of the tested material after immersion in ASTM No.3 Oil and in ASTM Fuel B for 70 hours at 100°C (212°F). The hose industry is currently classifying the materials as follows:

Material Classification		Tensile Retention	Volume Swell
Maximum Oil Resistance	ASTM No. 3 Oil ASTM Fuel B	80% Min. 50% Min.	25% Max. 35% Max.
Medium Oil Resistance	ASTM No. 3 Oil ASTM Fuel B	40% 35%	100% Max. 60% Max.
None Oil Resistance	ASTM No. 3 Oil ASTM Fuel B	Less Than 40% Less Than 35%	More Than 100% More Than 80%



800-852-1855



www.abbotruber.com

Technical Data

General Chemical Resistance of Typical Hose Compounds

Rubber

ASTM Designation D1418-93	Common Name	Composition	General Properties
CIIR	Chlorobutyl	Chloro-Isobutene-Isoprene	Excellent resistance to high heat steam. Very good weathering resistance, low permeability to air. Good physical properties. Poor resistance to petroleum-based fluids.
CR	Neoprene	Chloroprene	Excellent weathering resistance. Flame retarding. Good oil resistance. Good physical properties.
CSM	Hypalon®	Chloro-sulfonated polyethylene	Excellent ozone, weathering and acid resistance. Good abrasion and heat resistance. Can be compounded for good oil resistance.
EPDM	EPM or EPDM	Ethylene-propylene-diene-terpolymer	Good general purpose polymer. Excellent heat, ozone and weather resistance. Not oil resistant.
EU	Urethane	Polyether	Excellent abrasion, tear, and solvent resistance. Good aging. Poor high temperature properties.
FKM	Fluoroelastomer	Fluorocarbon rubber	Excellent high temperature resistance, particularly in air or oil. Very good chemical resistance.
MQ	Silicone	Dimethylpolysiloxane	Excellent high and low temperature resistance. Fair physical properties.
NBR	BUNA-N or Nitrile	Nitrile-Butadiene	Excellent oil resistance. Good physical properties.
NR	Natural	Isoprene Rubber (Natural)	Excellent physical properties, including abrasion resistance. Not oil resistant.
SBR	SBR	Styrene-Butadiene Rubber	Good physical properties, including abrasion resistance. Not oil resistant.
UHMWPE	UHMWPE	Ultra-High Molecular Weight Polyethylene	Excellent resistance to a majority of existing chemicals. Meets FDA requirements for food and beverages.
XLPE	Cross Linked Polyethylene	Cross Linked Polyethylene	Excellent resistance to most solvents, oils and chemicals. Do not confuse with chemical properties of standard polyethylene.
XNBR	Carboxylated nitrile	Carboxylated acrylonitrile-butadiene	Excellent oil and abrasion resistance.
	Synthetic Rubber	Synthetic Rubber	Compounded to meet general application requirements.


Technical Data

General Chemical Resistance of Typical Hose Compounds

Plastic

ASTM Designation D1600	Common Name	Composition	General Properties
PA	Nylon	Polyamide	Good abrasion, chemical and fatigue resistance. Good long term resistance to high temperature. Low gas permeation and low coefficient of friction.
PE	Polyethylene	Polyethylene	Excellent dielectric properties. Excellent resistance to water, acids, alkalis and solvents. Good abrasion and weathering resistance.
UHMW-PE	UHMWPE	Ultra high molecular weight polyethylene	Excellent resistance to a broad range of chemicals, excellent weight polyethylene abrasion resistance.
PVC	PVC	Polyvinyl chloride	Good weathering, moisture and flame resistance. General resistance to alkalis and weak acids. Good abrasion resistance.
TPES	Polyester	Thermoplastic polyester resin	Good flex fatigue and low temperature properties. High polyester resin resistance to deformation. Good resistance to abrasion, chemicals, hydraulic fluids and aromatic fuels.
TPE	Thermoplastic Rubber	Thermoplastic polyolefins and block copolymers of styrene and butadiene	Good weather and aging resistance. Good for water dilute acids and bases.
PTFE	Fluoropolymer	Polytetrafluoroethylene	Excellent high temperature properties and chemical resistance.

Male NPT Thread Sizes

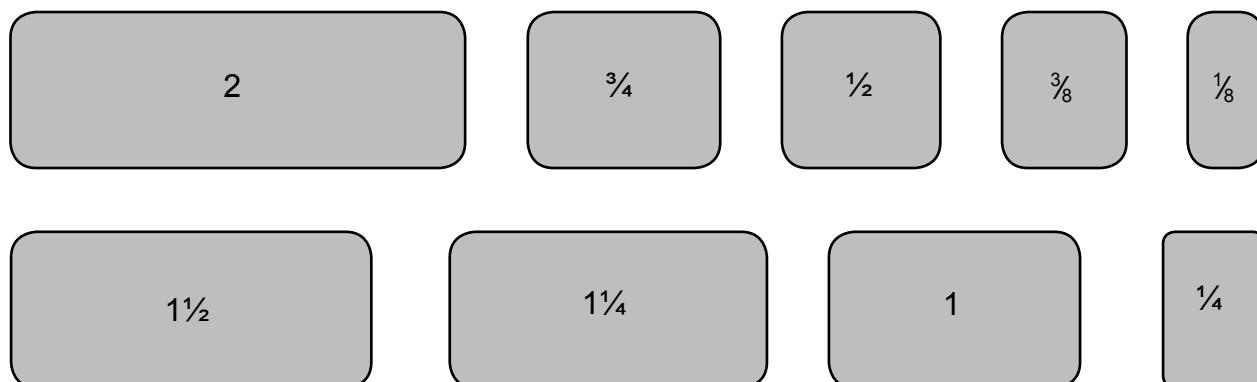

800-852-1855



www.abbottrubber.com

ABBOTT **RUBBER** **COMPANY, INC.**

**1700 NICHOLAS BLVD.
ELK GROVE VILLAGE, IL 60007
800.852.1855**

**ROCKFORD, IL BRANCH: 2335 NEWBURG ROAD.
BELVIDERE, IL 61008**

E-MAIL sales@abbotruber.com

WEBSITE www.abbotruber.com